


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.0V I:0.880A P:200.0W PF:0.988 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:39903.3x1 lm		
NAME: HB74-200H-5080-H00220	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 199.52 lm/W			
MODEL	/	Imax (cd)	20860	S/MH (C0/180)	1.20
NOMINAL POWER (W)	/	LOR (%)	100.0	S/MH (C90/270)	1.20
RATED VOLTAGE (V)	/	TOTAL FLUX (lm)	39903	η UP,DN (C0-180)	0.0,50.0
NOMINAL FLUX (lm)	39903.3	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	/	η down (%)	100.0	CIBSE SHR MAX	1.25

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

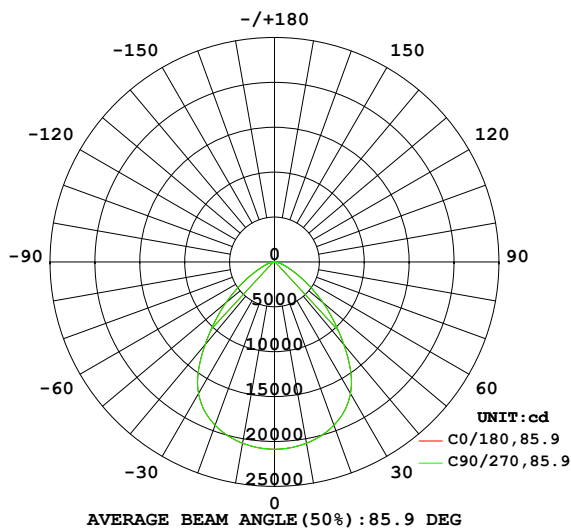

PLANAR ISOLUX DIAGRAM (UNIT:lx)

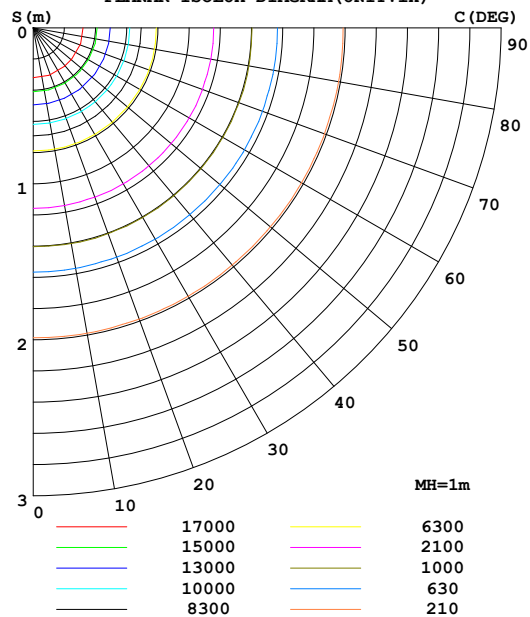

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-10-06

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2050	2050	2050	2050	2050	2050	2050	2050	0- 10	1974	1974	4.95,4.95
20	1935	1935	1935	1935	1935	1935	1935	1935	10- 20	5652	7626	19.1,19.1
30	1692	1692	1692	1692	1692	1692	1692	1692	20- 30	8429	16055	40.2,40.2
40	1202	1202	1202	1202	1202	1202	1202	1202	30- 40	9149	25204	63.2,63.2
50	706.0	706.0	706.0	706.0	706.0	706.0	706.0	706.0	40- 50	7257	32461	81.3,81.3
60	318.6	318.6	318.6	318.6	318.6	318.6	318.6	318.6	50- 60	4438	36899	92.5,92.5
70	121.9	121.9	121.9	121.9	121.9	121.9	121.9	121.9	60- 70	2008	38907	97.5,97.5
80	40.81	40.81	40.81	40.81	40.81	40.81	40.81	40.81	70- 80	807.6	39715	99.5,99.5
90	0.2622	0.2622	0.2622	0.2622	0.2622	0.2622	0.2622	0.2622	80- 90	188.7	39903	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 29150 lm

%lum = 73.1%

%lamp = 73.1%

Conical surface Flux(130deg): 38120 lm


%lum = 95.5%

%lamp = 95.5%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-10-06

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

LUMINANCE LIMITATION CURVES

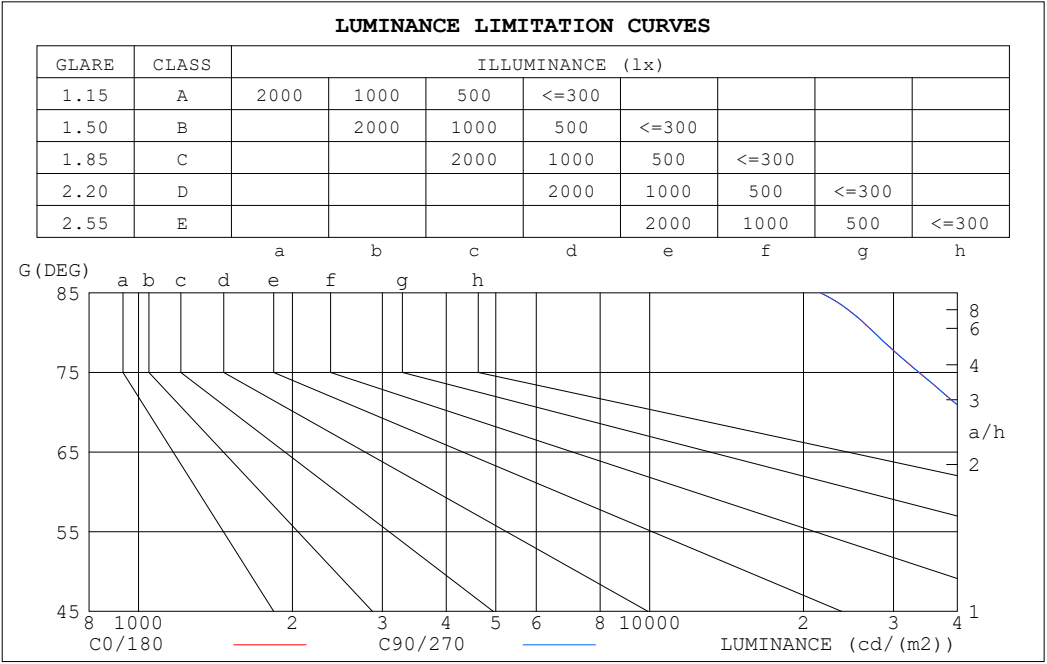

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	21580	21580
80	27520	27520
75	33656	33656
70	41724	41724
65	54113	54113
60	74614	74614
55	100322	100322
50	128615	128615
45	155515	155515

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:ZZX

Test Date:2023-10-06

γ Range: 0 - 90DEG

γ Interval: 0.5DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465

Humidity:65.0%


Test Distance:26.000m [K=0.4559]

Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.08	1.04	1.01	1.05	1.02	.00	1.01	.99	.96	.97	.95	.94	.94	.92	.91	.89
2.0	.97	.91	.87	.95	.90	.86	.91	.87	.84	.88	.85	.82	.85	.83	.80	.78
3.0	.87	.80	.75	.86	.79	.74	.83	.77	.73	.80	.76	.72	.78	.74	.71	.69
4.0	.79	.71	.66	.77	.71	.65	.75	.69	.64	.73	.68	.64	.71	.66	.63	.61
5.0	.72	.64	.58	.70	.63	.58	.68	.62	.57	.67	.61	.57	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.52	.63	.56	.51	.61	.55	.51	.60	.54	.50	.49
7.0	.60	.52	.47	.59	.52	.47	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.46	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

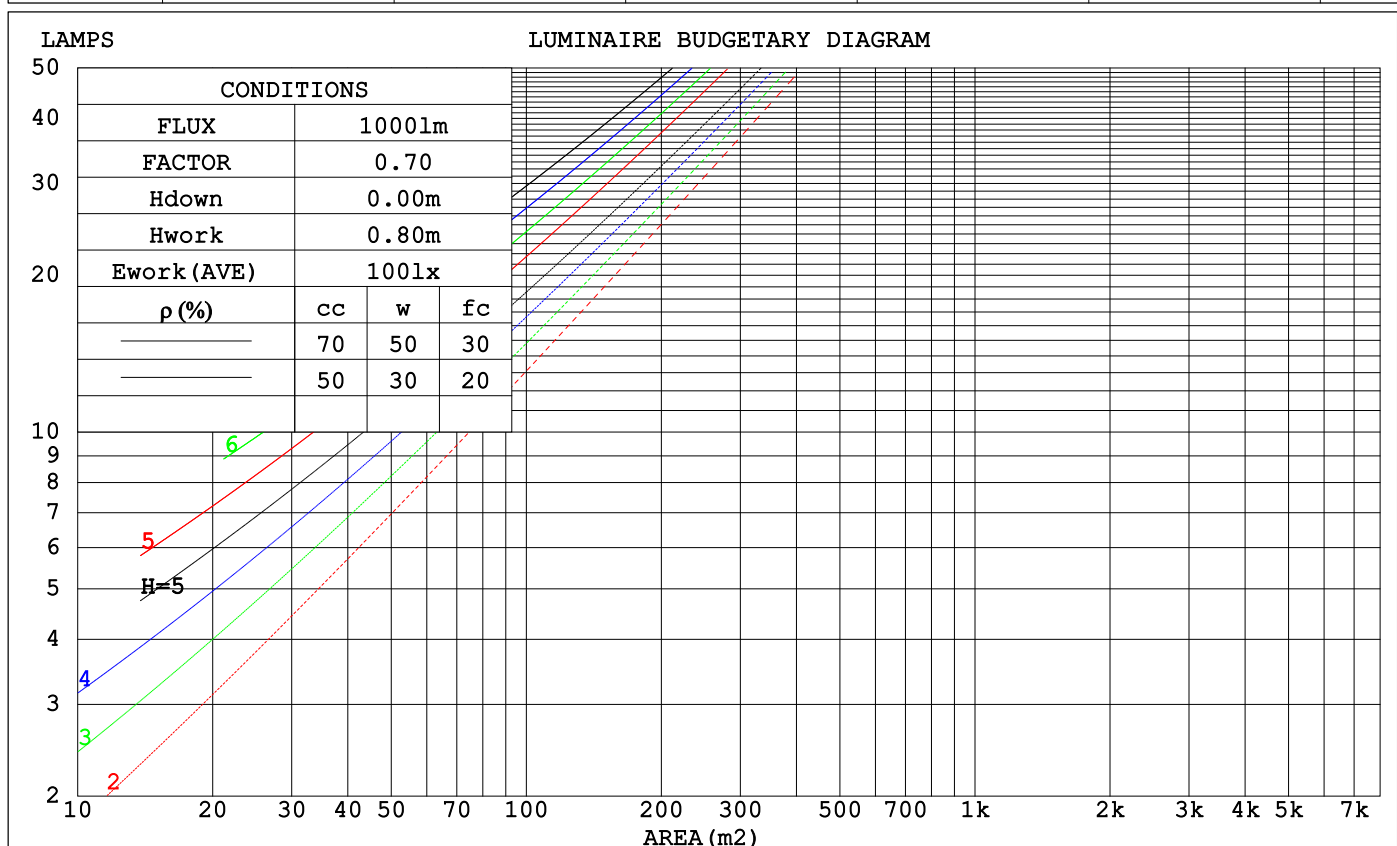

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: ZZK
 Test Date: 2023-10-06

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity: 65.0%
 Test Distance: 26.000m [K=0.4559]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.240	.136	.043	.233	.133	.042	.220	.126	.040	.208	.120	.039	.197	.114	.037	
2.0	.233	.127	.039	.227	.125	.038	.215	.120	.037	.205	.115	.036	.196	.111	.035	
3.0	.221	.118	.035	.216	.115	.035	.206	.112	.034	.197	.108	.033	.188	.104	.032	
4.0	.208	.108	.032	.204	.107	.032	.195	.104	.031	.187	.101	.030	.180	.098	.030	
5.0	.196	.100	.029	.192	.099	.029	.185	.096	.028	.178	.094	.028	.171	.091	.027	
6.0	.185	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.025	
7.0	.175	.086	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.080	.024	
8.0	.165	.081	.023	.162	.080	.023	.157	.078	.022	.152	.077	.022	.147	.076	.022	
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.072	.021	.140	.071	.021	
10.0	.149	.071	.020	.146	.071	.020	.142	.069	.020	.138	.068	.019	.134	.067	.019	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.175	.157	.140	.150	.135	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
2.0	.164	.132	.105	.141	.114	.091	.096	.079	.063	.056	.046	.037	.018	.015	.012	
3.0	.155	.114	.081	.133	.098	.070	.091	.068	.049	.053	.040	.029	.017	.013	.010	
4.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008	
5.0	.139	.089	.052	.120	.077	.045	.082	.054	.032	.048	.032	.019	.015	.010	.006	
6.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
7.0	.126	.074	.036	.109	.064	.032	.075	.045	.023	.044	.026	.013	.014	.009	.004	
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
9.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:ZZX
 Test Date:2023-10-06

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity:65.0%
 Test Distance:26.000m [K=0.4559]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	26.2	27.6	26.5	27.9	28.2	26.2	27.6	26.5	27.9	28.2
	3H	26.8	28.0	27.2	28.4	28.7	26.8	28.0	27.2	28.4	28.7
	4H	27.0	28.1	27.4	28.5	28.9	27.0	28.1	27.4	28.5	28.9
	6H	27.1	28.1	27.5	28.5	28.9	27.1	28.1	27.5	28.5	28.9
	8H	27.1	28.1	27.5	28.5	28.9	27.1	28.1	27.5	28.5	28.9
	12H	27.1	28.1	27.5	28.4	28.9	27.1	28.1	27.5	28.4	28.9
	4H	26.4	27.5	26.8	27.9	28.2	26.4	27.5	26.8	27.9	28.2
	3H	27.1	28.1	27.6	28.5	28.9	27.1	28.1	27.6	28.5	28.9
	4H	27.4	28.2	27.8	28.7	29.1	27.4	28.2	27.8	28.7	29.1
	6H	27.6	28.3	28.0	28.8	29.2	27.6	28.3	28.0	28.8	29.2
	8H	27.6	28.3	28.1	28.7	29.2	27.6	28.3	28.1	28.7	29.2
	12H	27.6	28.2	28.1	28.7	29.2	27.6	28.2	28.1	28.7	29.2
8H	4H	27.4	28.1	27.9	28.6	29.0	27.4	28.1	27.9	28.6	29.0
	6H	27.7	28.2	28.2	28.7	29.2	27.7	28.2	28.2	28.7	29.2
	8H	27.8	28.3	28.3	28.8	29.3	27.8	28.3	28.3	28.8	29.3
	12H	27.8	28.3	28.3	28.7	29.3	27.8	28.3	28.3	28.7	29.3
12H	4H	27.4	28.0	27.9	28.5	29.0	27.4	28.0	27.9	28.5	29.0
	6H	27.7	28.2	28.2	28.6	29.2	27.7	28.2	28.2	28.6	29.2
	8H	27.8	28.2	28.3	28.7	29.3	27.8	28.2	28.3	28.7	29.3
CIE190: 2010											

CIE190: 2010
Area: 0.0854 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-10-06

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	68	58	53	67	58	52	66	58	52	47
0.80	78	69	63	77	68	63	76	68	62	56
1.00	86	77	71	85	77	71	83	77	71	65
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	89	83	95	88	83	92	86	82	76
2.00	102	95	90	100	94	90	97	92	88	82
2.50	104	99	94	103	97	93	99	95	91	84
3.00	107	102	98	105	100	97	101	98	94	87
4.00	110	106	102	108	104	101	104	101	98	90
5.00	112	108	105	109	106	103	105	103	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004						Suspended			SHRNOM = 1.25	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: ZZX
 Test Date: 2023-10-06

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity: 65.0%
 Test Distance: 26.000m [K=0.4559]
 Remarks:


ISOCANDELA DIAGRAM

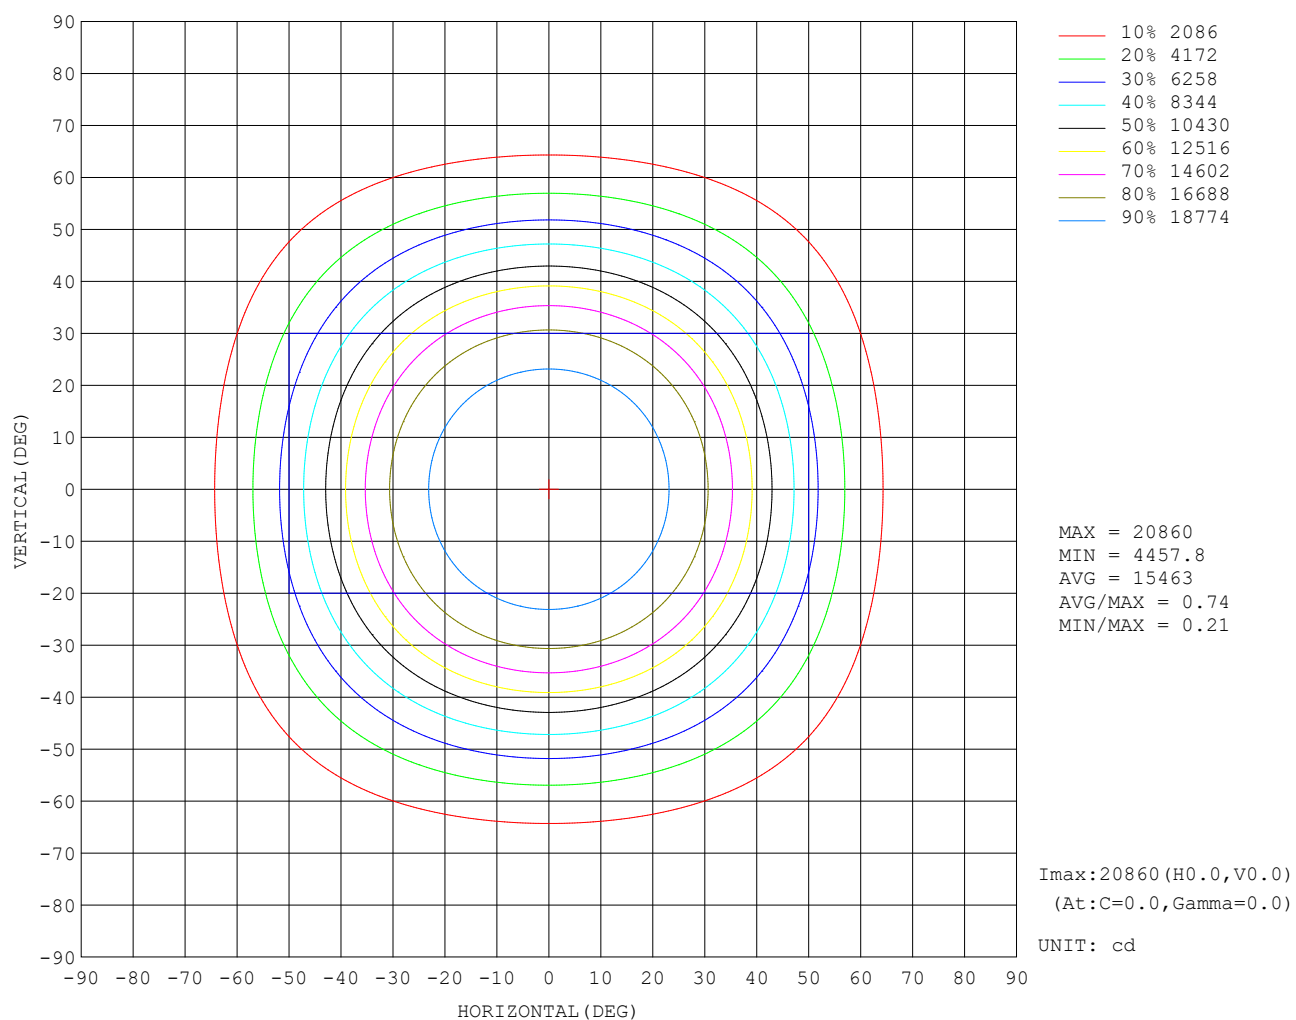

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-10-06

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

AAI Figure

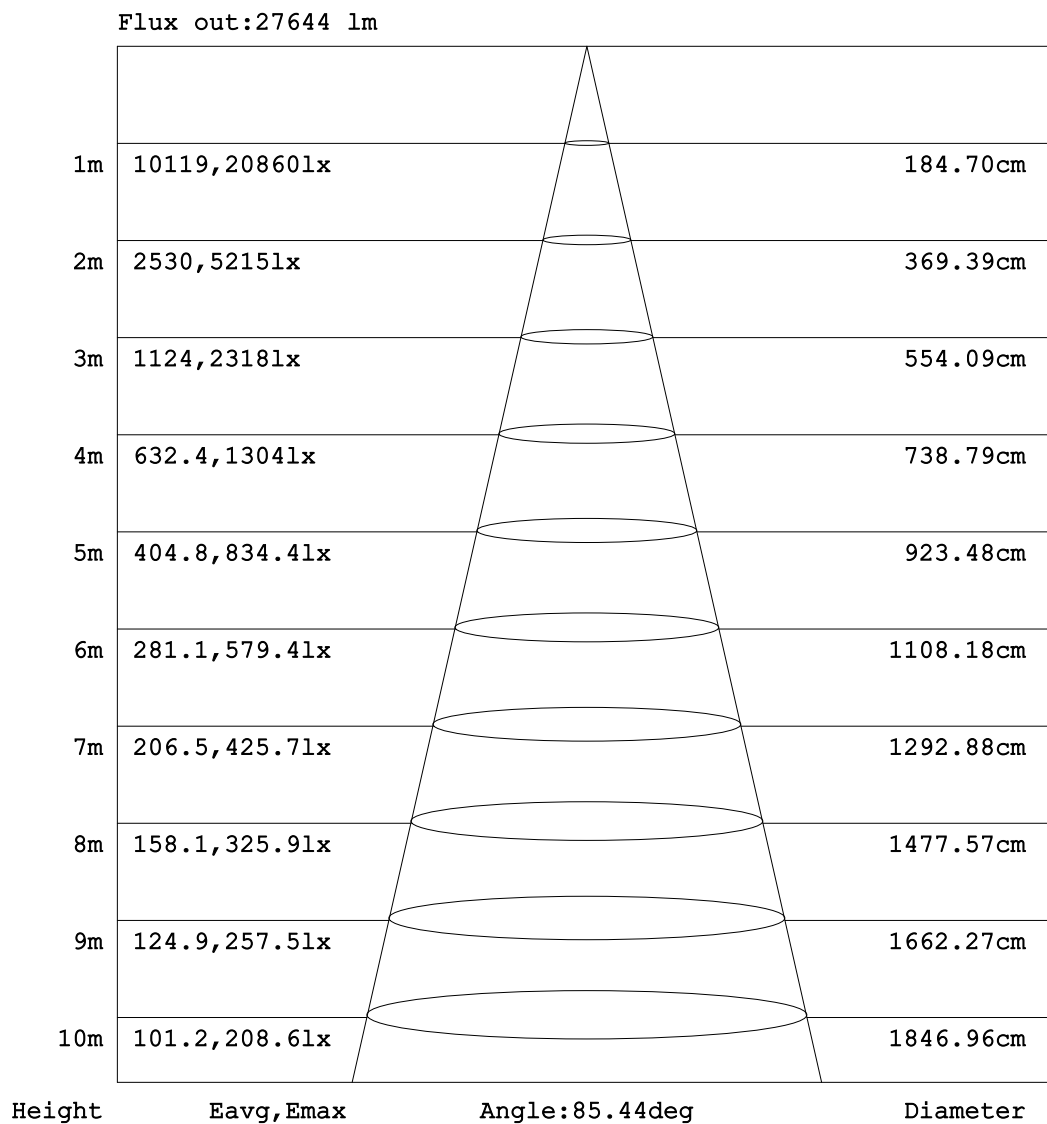


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-10-06

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

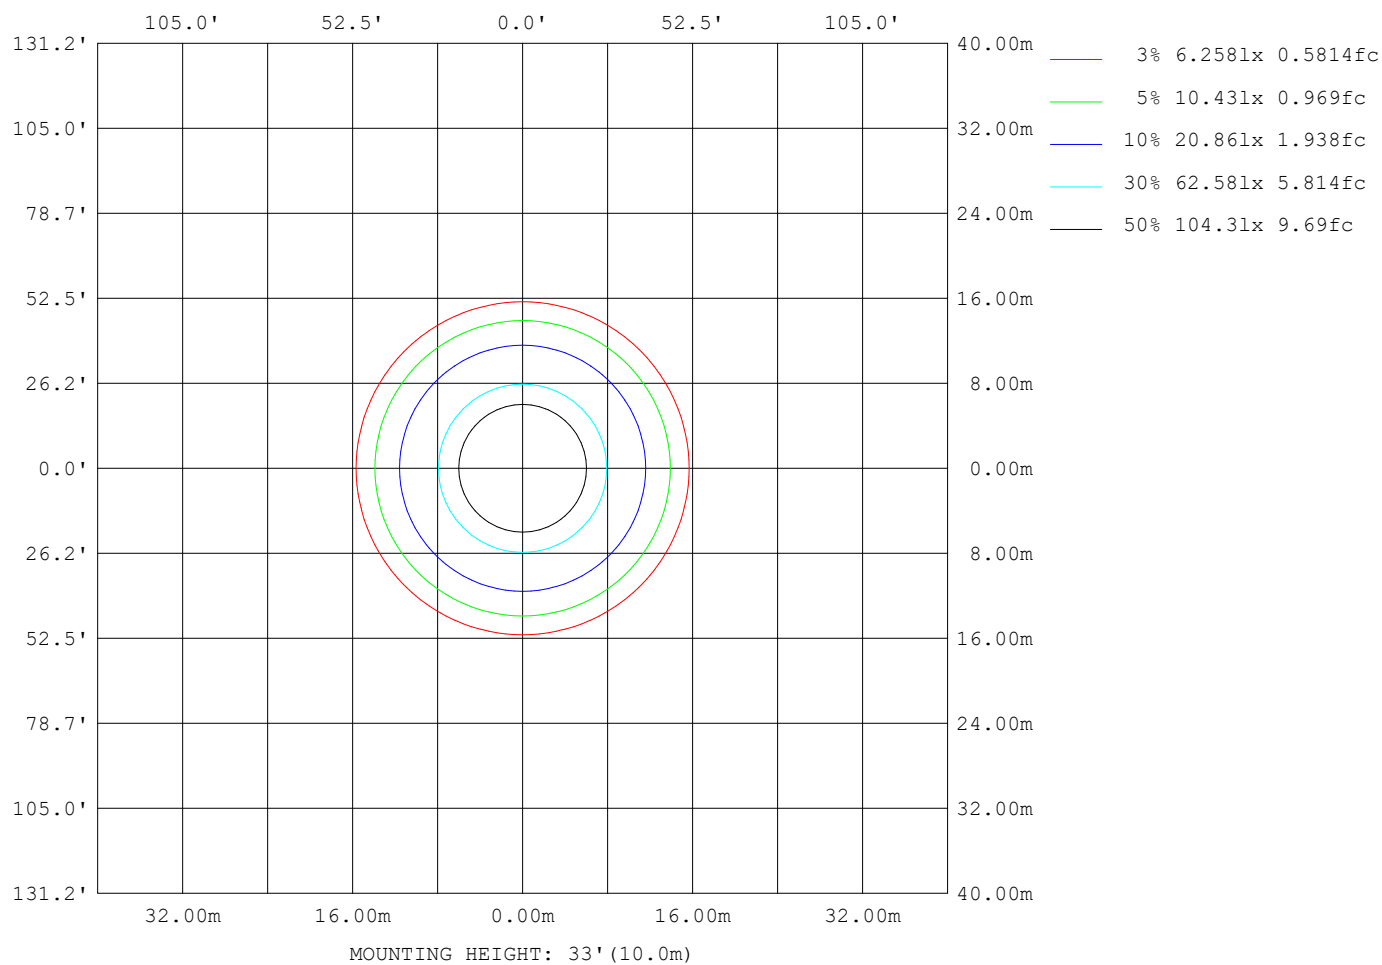

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2023-10-06

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4559]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LED Avg.L Report

Test:U:230.0V I:0.880A P:200.0W PF:0.988 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:39903.3x1 lm		
NAME: HB74-200H-5080-H00220	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	54113
L_0~180 (75) av	33656
L_0~180 (85) av	21580
L_90~270 (65) av	54113
L_90~270 (75) av	33656
L_90~270 (85) av	21580
L_45 (65) av	54113
L_45 (75) av	33656
L_45 (85) av	21580

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:ZZX
Test Date:2023-10-06

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

Planar Illuminance Curve

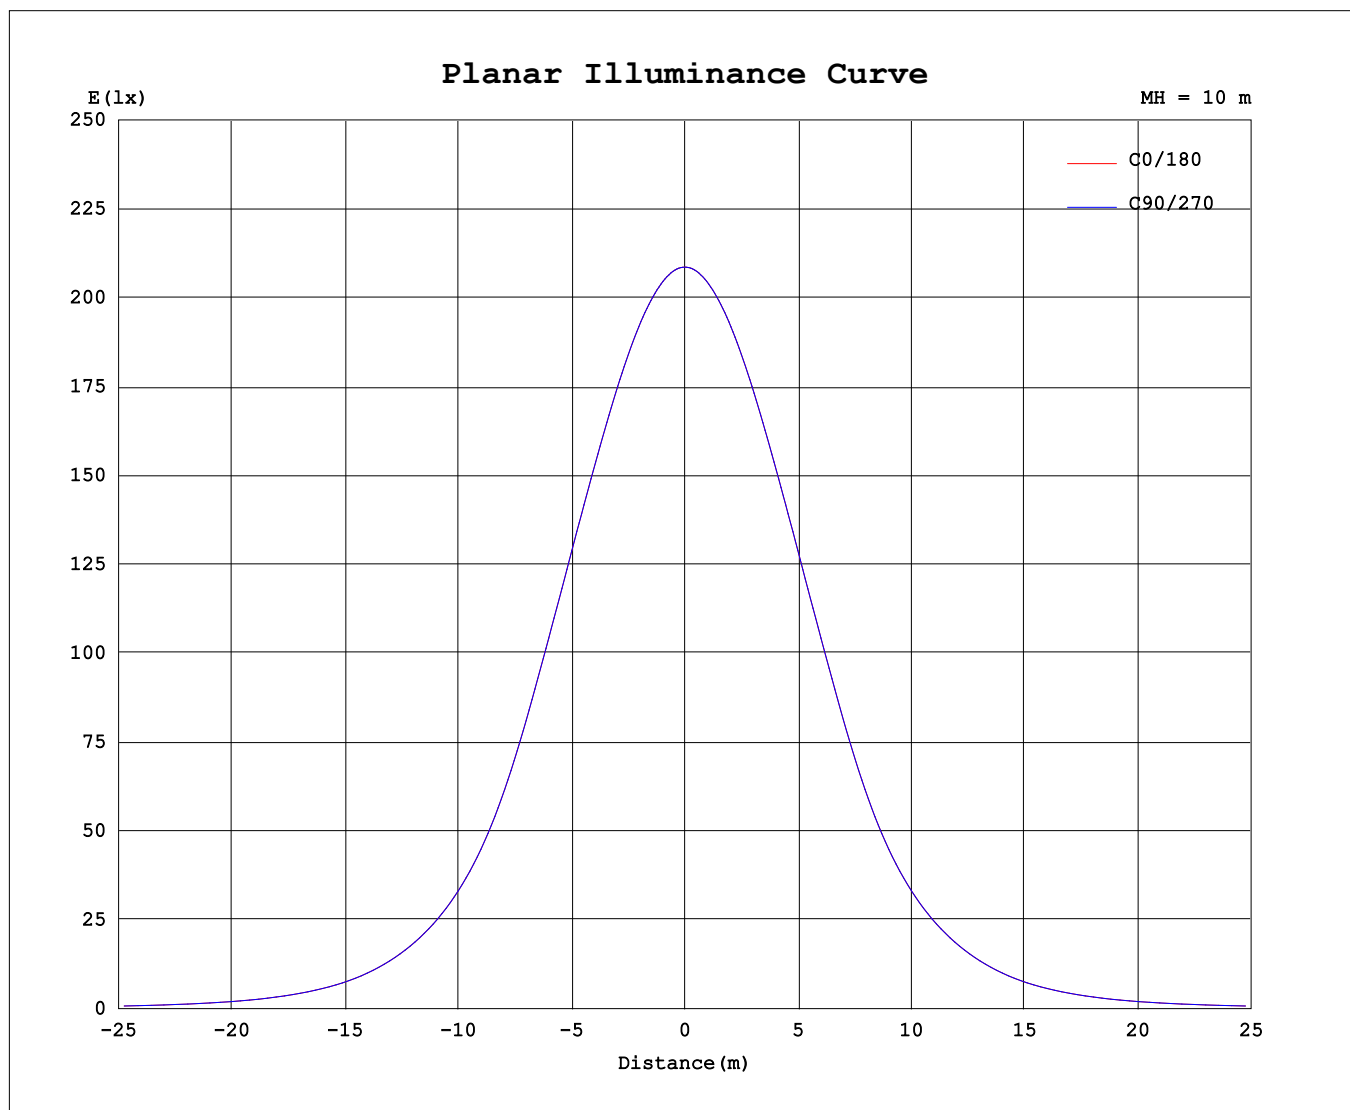

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2023-10-06

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4559]
Remarks:

UNIT: X10cd

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2023-10-06

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

```