


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.0V I:2.141A P:480.0W PF:0.975 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:68079.9x1 lm		
NAME: SP04-480-5770-F04045X	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 141.83 lm/W			
MODEL	/	Imax (cd)	120447	S/MH (C0/180)	0.69
NOMINAL POWER (W)	/	LOR (%)	100.0	S/MH (C90/270)	0.66
RATED VOLTAGE (V)	/	TOTAL FLUX (lm)	68080	η UP, DN (C0-180)	0.0, 50.7
NOMINAL FLUX (lm)	68079.9	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	/	η down (%)	100.0	CIBSE SHR MAX	0.70

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

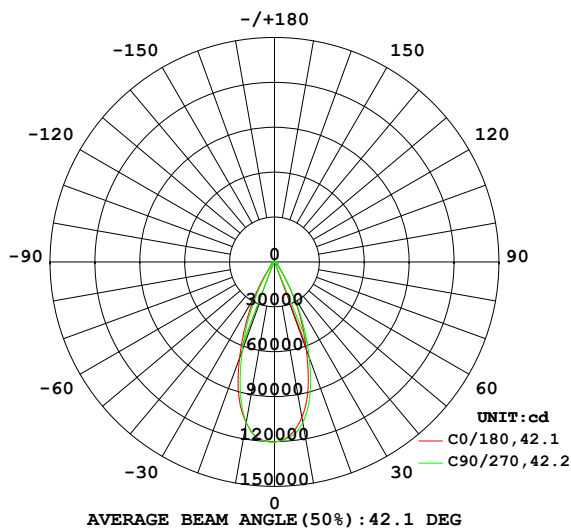

PLANAR ISOLUX DIAGRAM (UNIT: lx)

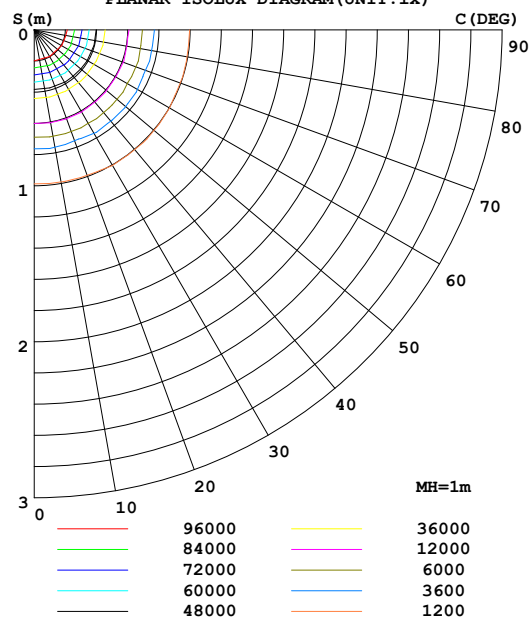

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2023-12-01

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4621]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1054	1071	1089	1098	1090	1100	1089	1061	0- 10	10948	10948	16.1,16.1
20	621.4	655.9	678.5	690.1	681.8	665.0	631.0	621.8	10- 20	24444	35392	52,52
30	222.6	222.5	233.2	242.1	257.4	224.7	204.6	205.1	20- 30	19218	54610	80.2,80.2
40	47.75	50.91	50.28	55.34	53.54	52.00	45.54	49.02	30- 40	6936	61546	90.4,90.4
50	24.35	27.18	25.51	28.39	25.99	27.51	24.44	26.89	40- 50	2682	64228	94.3,94.3
60	16.28	17.36	16.95	18.14	17.33	17.50	16.67	16.94	50- 60	1905	66133	97.1,97.1
70	9.179	9.385	9.478	9.491	9.477	9.039	8.837	8.949	60- 70	1284	67417	99,99
80	2.615	2.498	2.505	2.454	2.635	2.209	2.152	2.263	70- 80	577.5	67994	99.9,99.9
90	0.0194	0.0214	0.0186	0.0153	0.0163	0.0144	0.0126	0.0148	80- 90	85.79	68080	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X100cd									UNIT:lm		

Conical surface Flux(90deg): 63044 lm

%lum = 92.6%

%lamp = 92.6%

Conical surface Flux(120deg): 66133 lm


%lum = 97.1%

%lamp = 97.1%

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-12-01

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

LUMINANCE LIMITATION CURVES

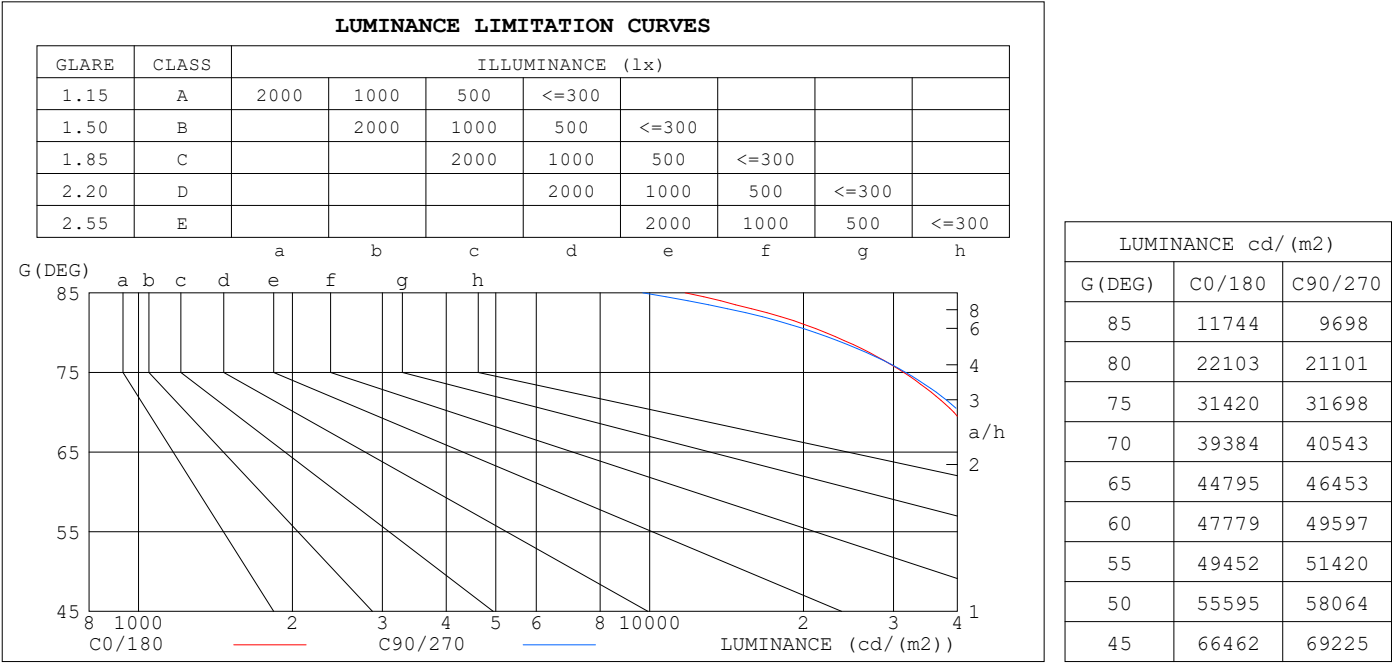


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:ZZX
Test Date:2023-12-01

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.09	1.07	1.05	1.05	1.03	1.01	1.01	.00	.98	.98	.96	.95	.94
2.0	1.03	.00	.96	1.02	.98	.95	.99	.96	.93	.96	.93	.91	.93	.91	.89	.88
3.0	.97	.92	.88	.96	.91	.88	.93	.89	.86	.91	.88	.85	.88	.86	.84	.82
4.0	.91	.86	.82	.90	.85	.82	.88	.84	.81	.86	.82	.80	.84	.81	.79	.77
5.0	.86	.81	.77	.85	.80	.76	.83	.79	.76	.82	.78	.75	.80	.77	.74	.73
6.0	.82	.76	.72	.81	.76	.72	.79	.75	.71	.78	.74	.71	.77	.73	.70	.69
7.0	.77	.72	.68	.77	.72	.68	.76	.71	.67	.74	.70	.67	.73	.70	.67	.65
8.0	.74	.68	.64	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.62
9.0	.70	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.61	.59
10.0	.67	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.65	.61	.58	.57

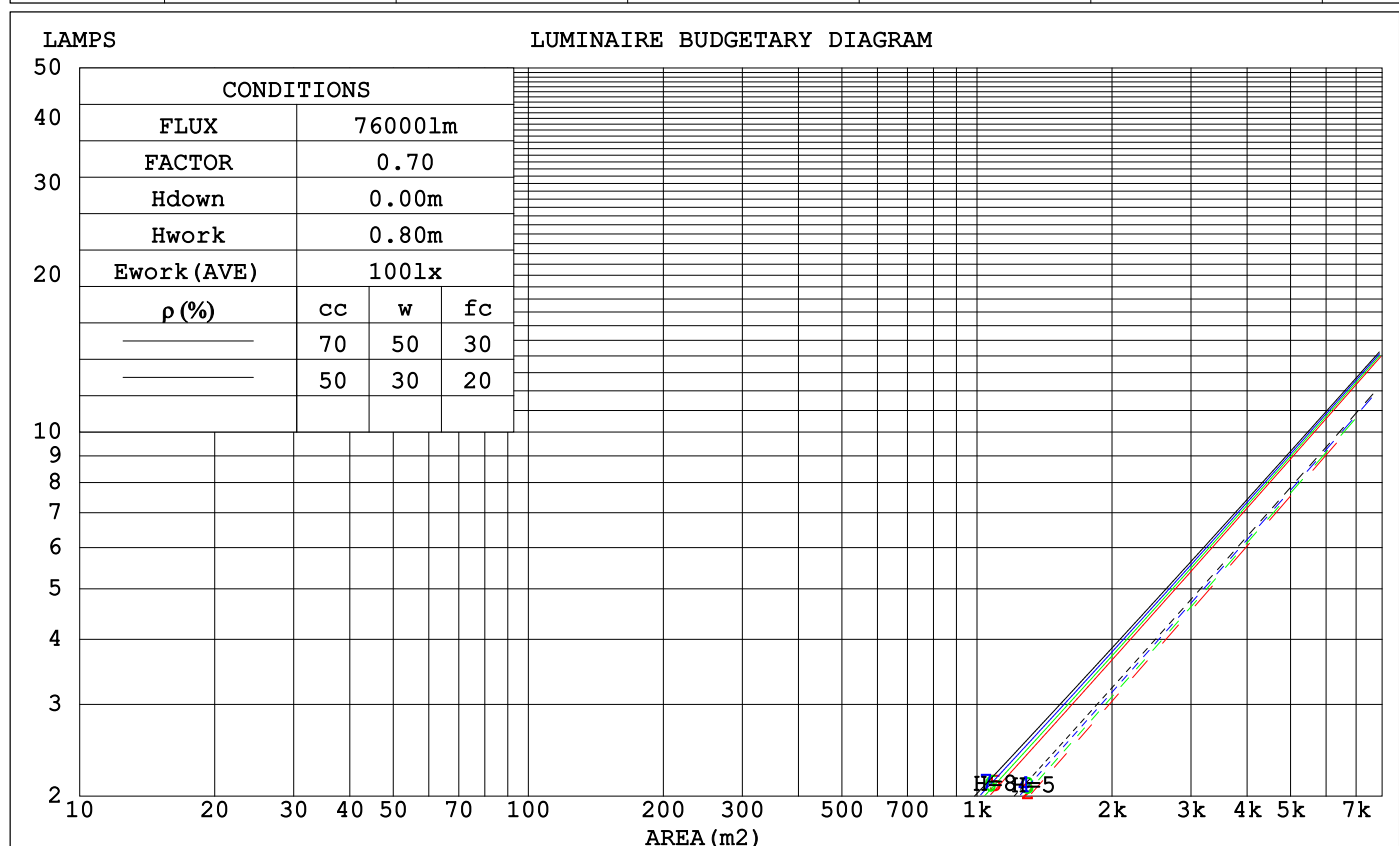

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:ZZX
 Test Date:2023-12-01

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity:65.0%
 Test Distance:26.000m [K=0.4621]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.176	.100	.032	.169	.096	.031	.157	.090	.029	.145	.084	.027	.134	.078	.025	
2.0	.167	.091	.028	.161	.089	.027	.150	.084	.026	.141	.079	.025	.132	.074	.023	
3.0	.157	.084	.025	.152	.082	.025	.143	.078	.024	.135	.074	.023	.127	.070	.022	
4.0	.148	.077	.023	.144	.075	.022	.136	.072	.022	.129	.069	.021	.122	.067	.020	
5.0	.140	.071	.021	.136	.070	.020	.130	.068	.020	.124	.065	.019	.118	.063	.019	
6.0	.133	.067	.019	.130	.065	.019	.124	.063	.018	.118	.061	.018	.113	.060	.018	
7.0	.126	.062	.018	.123	.061	.018	.118	.060	.017	.113	.058	.017	.109	.057	.017	
8.0	.120	.059	.017	.118	.058	.016	.113	.057	.016	.109	.055	.016	.105	.054	.016	
9.0	.115	.056	.015	.113	.055	.015	.109	.054	.015	.105	.052	.015	.101	.051	.015	
10.0	.110	.053	.015	.108	.052	.015	.104	.051	.014	.101	.050	.014	.097	.049	.014	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.156	.133	.113	.133	.114	.098	.091	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.143	.114	.090	.122	.098	.078	.084	.068	.055	.049	.040	.032	.016	.013	.011	
4.0	.132	.099	.073	.113	.085	.064	.078	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.123	.087	.061	.105	.075	.053	.073	.053	.037	.042	.031	.022	.014	.010	.007	
6.0	.115	.078	.051	.099	.067	.044	.068	.047	.031	.040	.028	.019	.013	.009	.006	
7.0	.108	.070	.043	.093	.061	.038	.064	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.102	.063	.037	.088	.055	.032	.061	.039	.023	.035	.023	.014	.011	.007	.005	
9.0	.097	.058	.032	.083	.050	.028	.058	.035	.020	.034	.021	.012	.011	.007	.004	
10.0	.092	.054	.028	.079	.047	.025	.055	.033	.018	.032	.019	.010	.010	.006	.003	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:ZZX
 Test Date:2023-12-01

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity:65.0%
 Test Distance:26.000m [K=0.4621]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.0	21.1	20.4	21.4	21.7	20.2	21.2	20.6	21.5	21.9
3H	21.6	22.5	22.0	22.8	23.2	21.7	22.6	22.1	22.9	23.3
4H	22.0	22.8	22.4	23.2	23.6	22.1	22.9	22.5	23.3	23.6
6H	22.2	23.0	22.6	23.3	23.7	22.2	23.0	22.6	23.4	23.8
8H	22.2	22.9	22.7	23.3	23.7	22.2	22.9	22.7	23.3	23.8
12H	22.2	22.9	22.6	23.3	23.7	22.2	22.9	22.6	23.3	23.7
4H 2H	20.6	21.4	21.0	21.8	22.2	20.8	21.6	21.2	22.0	22.4
3H	22.3	23.0	22.7	23.4	23.8	22.3	23.0	22.8	23.4	23.8
4H	22.8	23.4	23.2	23.8	24.3	22.8	23.4	23.2	23.8	24.3
6H	23.0	23.6	23.5	24.0	24.5	23.0	23.5	23.5	24.0	24.5
8H	23.1	23.6	23.5	24.0	24.5	23.0	23.5	23.5	24.0	24.4
12H	23.1	23.5	23.5	24.0	24.4	23.0	23.4	23.5	23.9	24.4
8H 4H	22.9	23.4	23.4	23.8	24.3	22.9	23.4	23.4	23.8	24.3
6H	23.2	23.6	23.7	24.1	24.6	23.2	23.5	23.7	24.0	24.5
8H	23.2	23.6	23.8	24.1	24.6	23.2	23.5	23.7	24.0	24.5
12H	23.3	23.6	23.8	24.1	24.6	23.2	23.5	23.7	24.0	24.5
12H 4H	22.8	23.3	23.3	23.8	24.2	22.9	23.3	23.3	23.8	24.2
6H	23.2	23.5	23.7	24.0	24.5	23.1	23.5	23.7	23.9	24.5
8H	23.2	23.5	23.8	24.0	24.6	23.2	23.5	23.7	24.0	24.6
CIE190: 2010										

CIE190: 2010
Area: 0.06829 m2

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-12-01

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	93	87	83	92	87	83	91	86	82	79
1.00	98	92	88	97	91	88	95	91	87	83
1.25	102	96	93	101	96	92	99	95	91	87
1.50	105	100	96	103	99	96	101	97	94	90
2.00	108	103	100	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	105	102	99	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	113	110	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004						Suspended			SHRNOM = 1.25	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: ZZX
 Test Date: 2023-12-01

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity: 65.0%
 Test Distance: 26.000m [K=0.4621]
 Remarks:


ISOCANDELA DIAGRAM

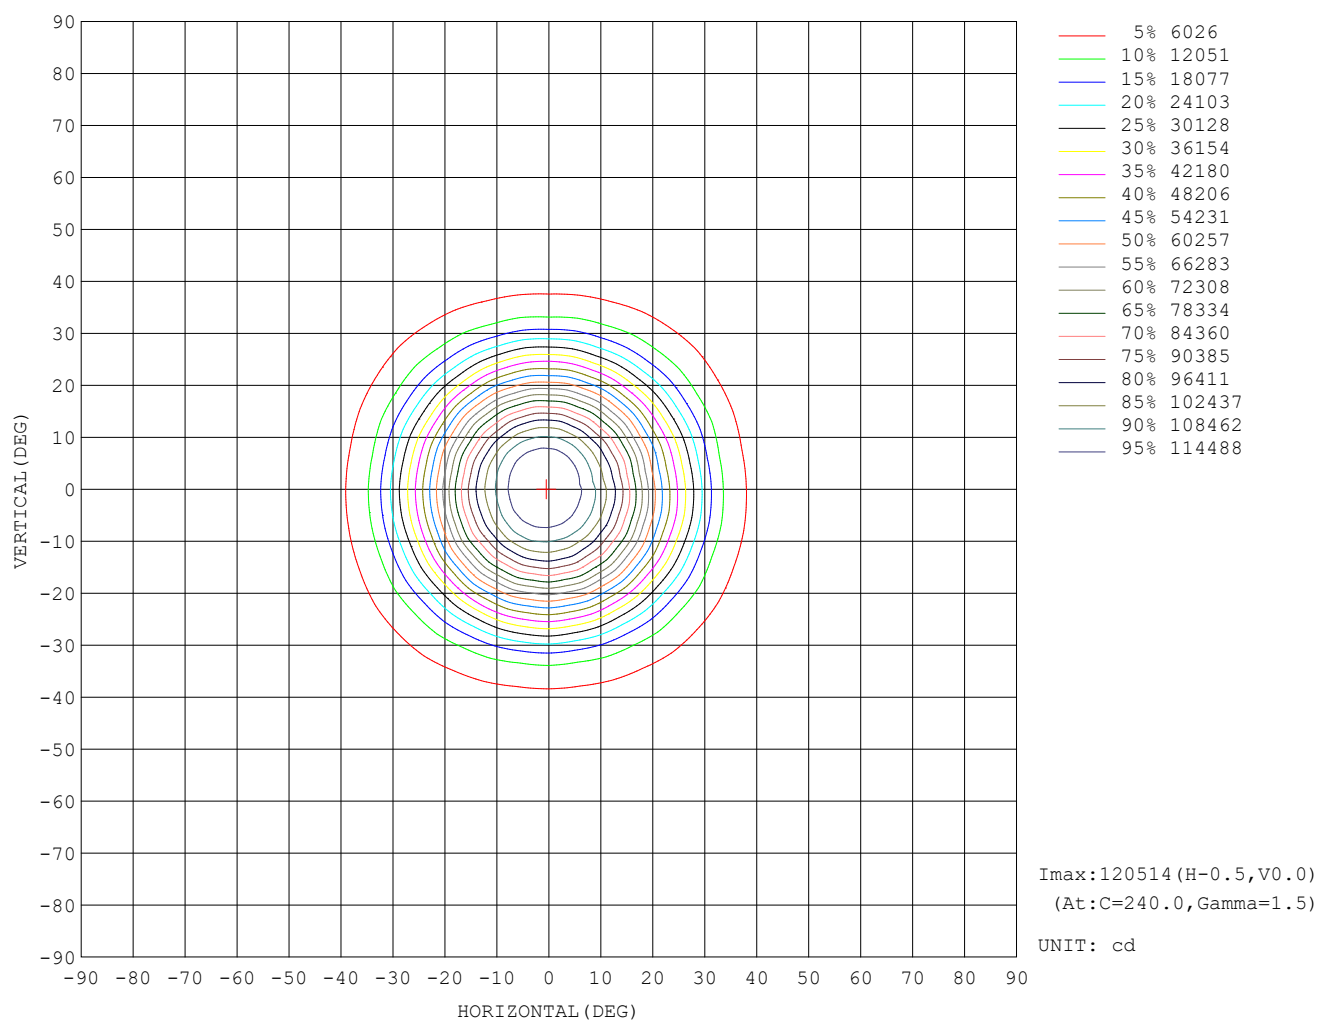

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-12-01

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

AAI Figure

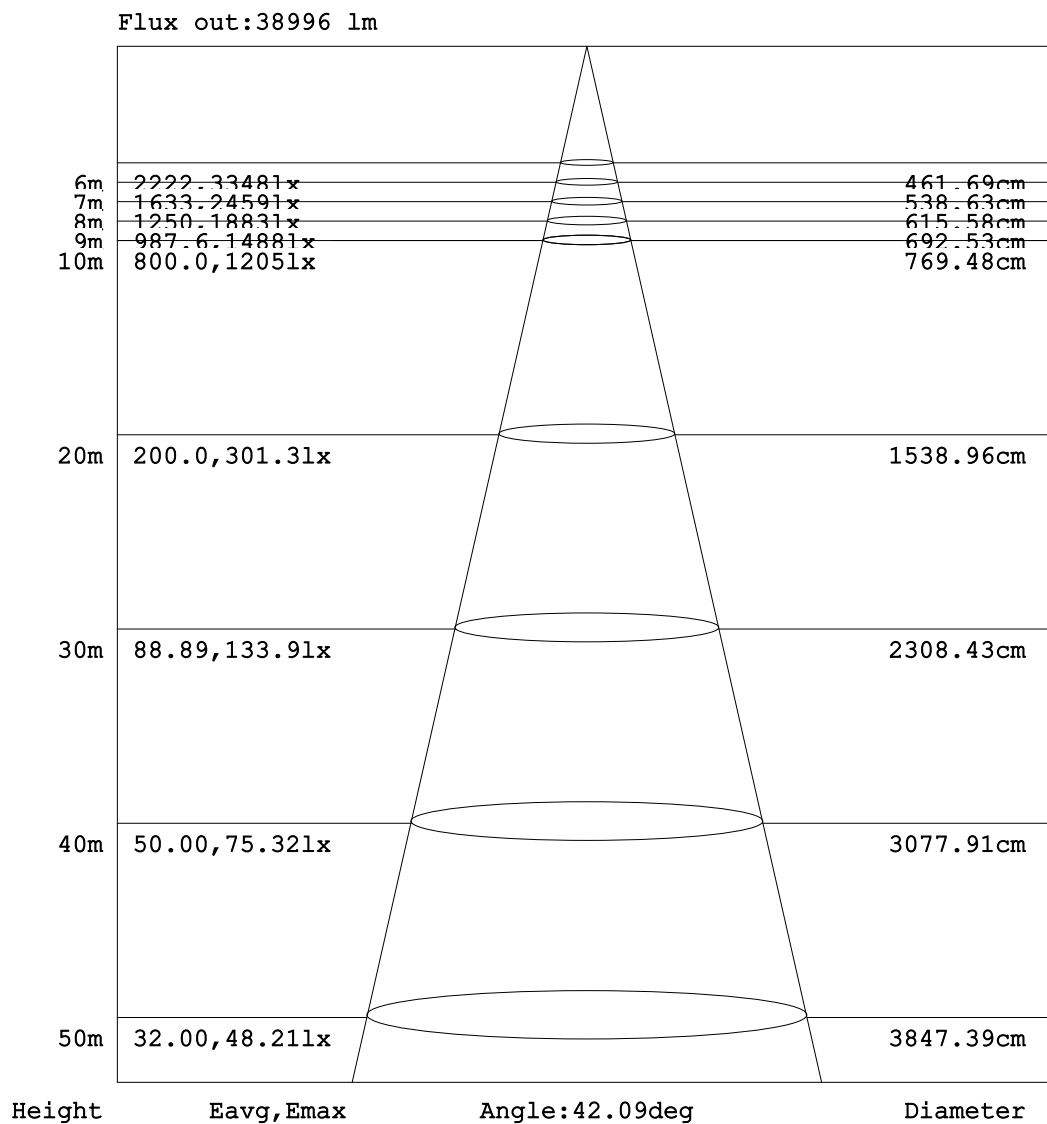


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-12-01

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


ISOLUX DIAGRAM

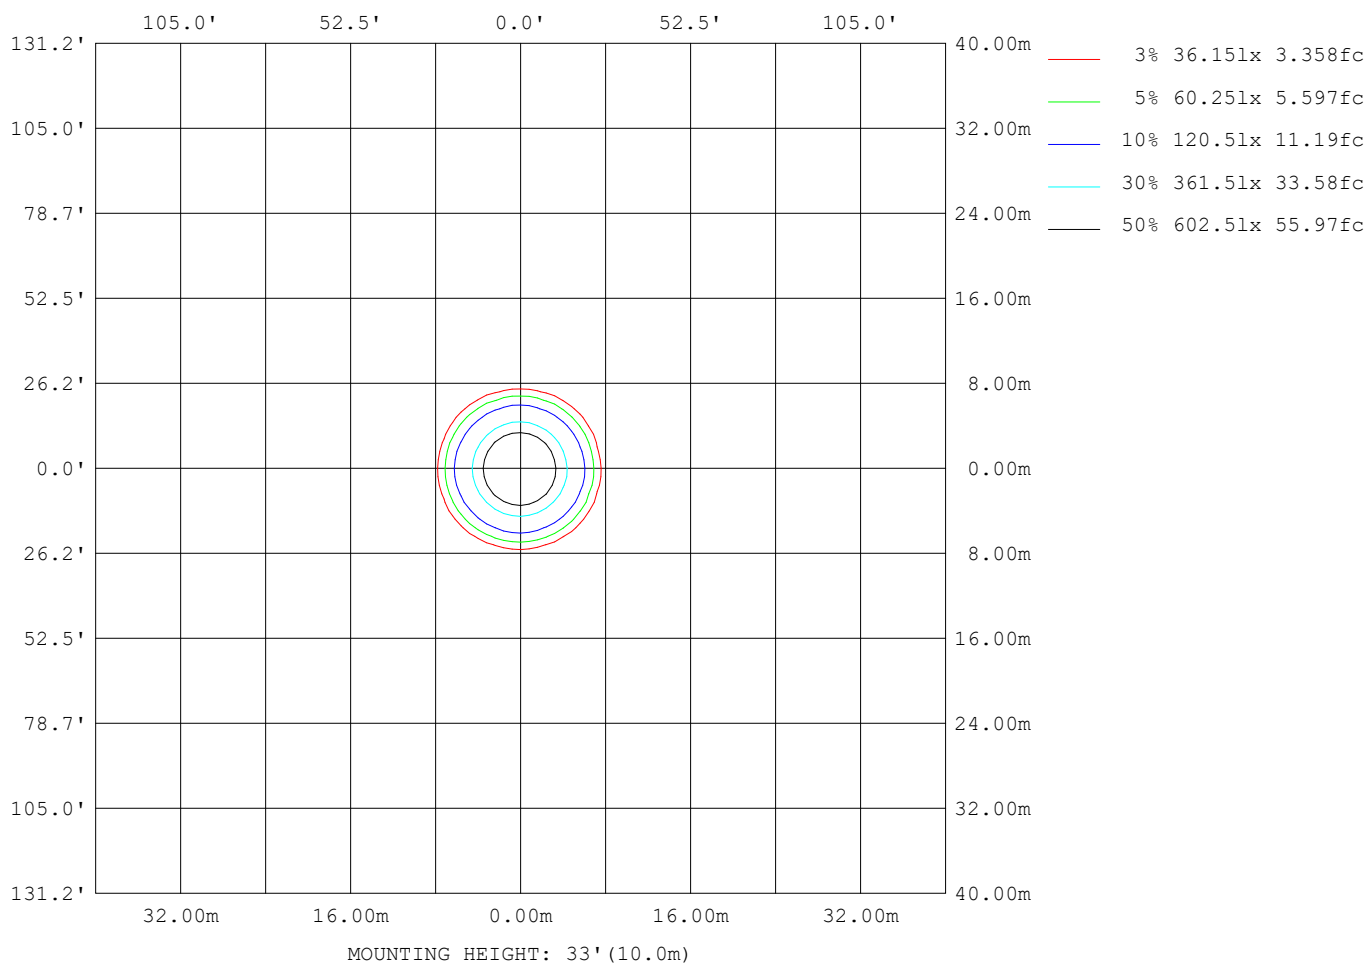

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2023-12-01

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4621]
Remarks:

Planar Illuminance Curve

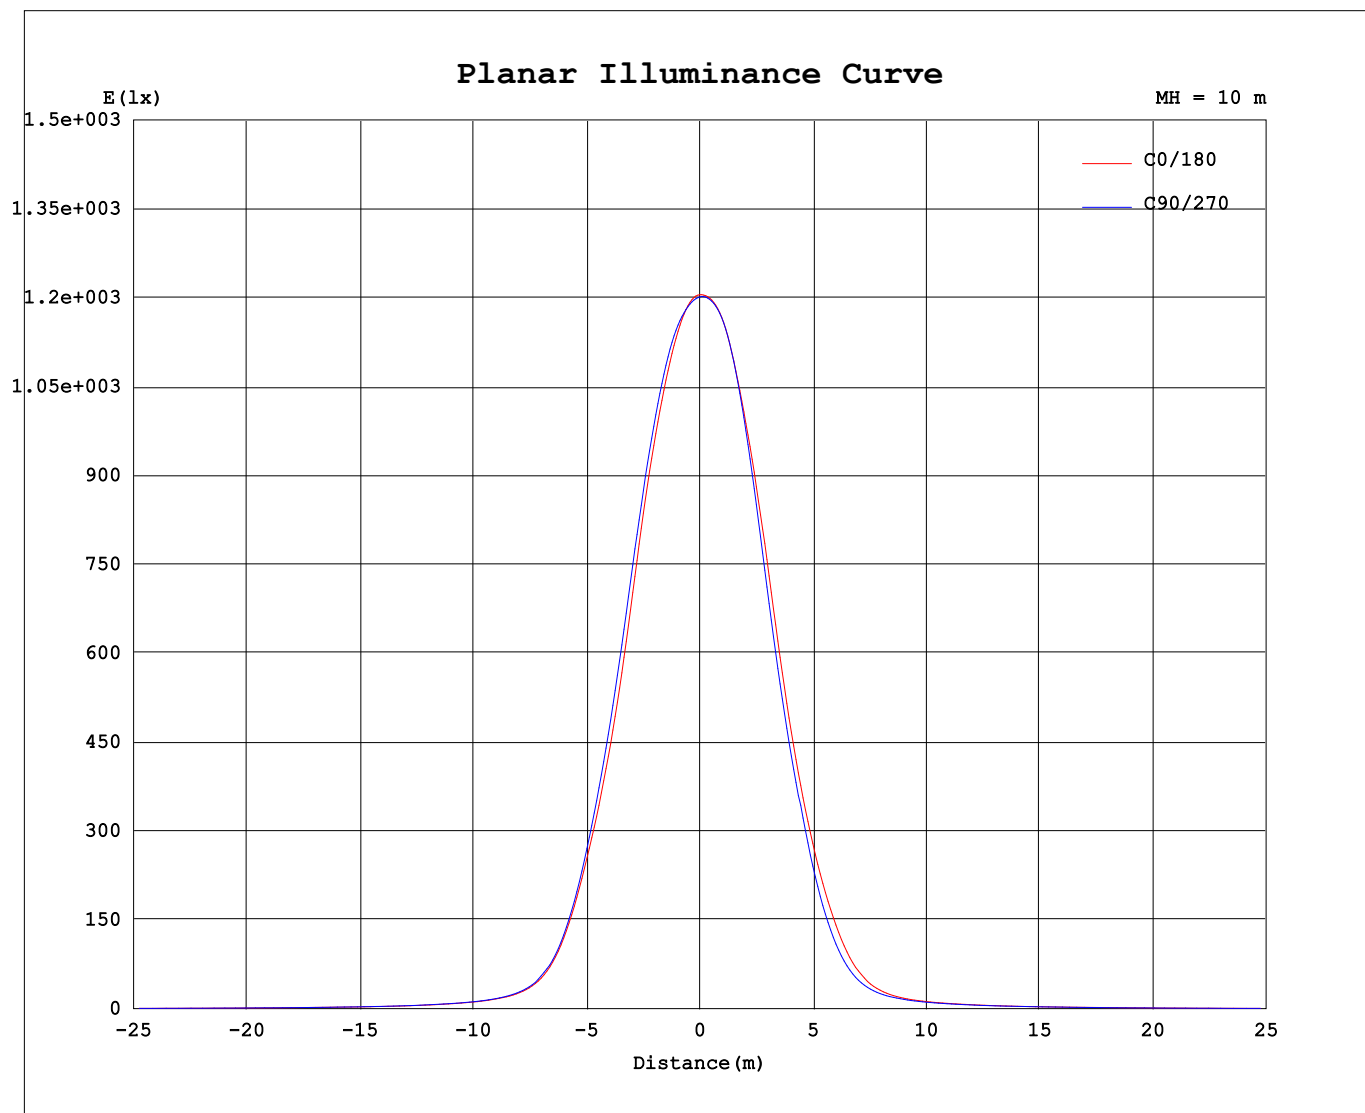

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2023-12-01

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4621]
Remarks:

UNIT: X100cd

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 10.0DEG	γ Interval: 0.5DEG
Test Speed: HIGH	Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Temperature: 25.3°C	Humidity: 65.0%
Operators: ZZX	Test Distance: 26.000m [K=0.4621]
Test Date: 2023-12-01	Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

```

UNIT: X100cd

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

```