
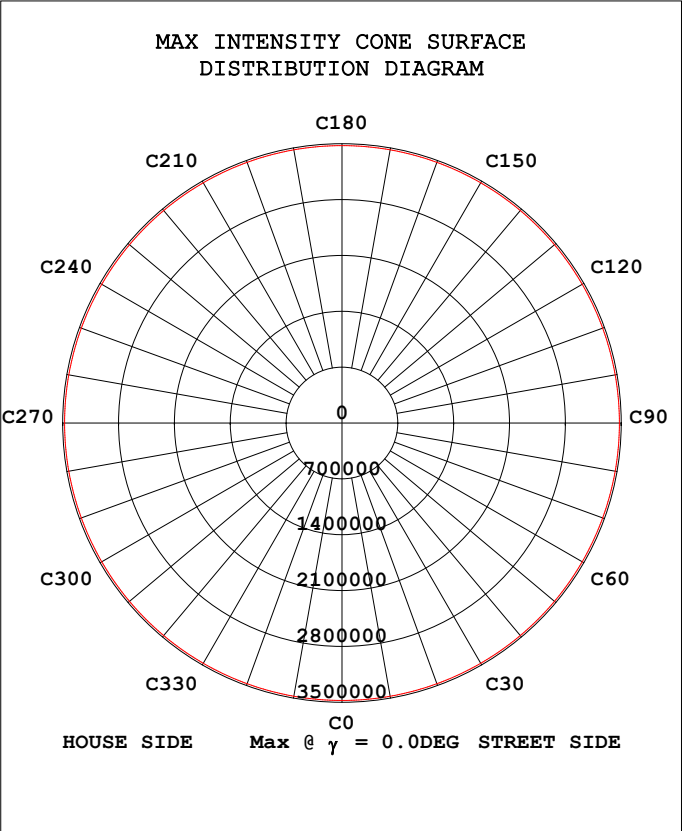


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:230.0V I:7.842A P:1800.0W PF:0.998 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:250010x1 lm		
NAME: SP04-1K8-5770-F04011X	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA Eff: 138.89 lm/W			
MODEL	/	I _{max} (cd)	3476643	η street_up (%)	0.0
NOMINAL POWER (W)	/	LOR (%)	100.0	η street_down (%)	47.3
RATED VOLTAGE (V)	/	TOTAL FLUX (lm)	250010	η house_up (%)	0.0
NOMINAL FLUX (lm)	250010	MAXIMUM @ (C, γ)	110,0.0	η house_down (%)	52.7
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	
TEST VOLTAGE (V)	230	η down (%)	100.0	SLI	

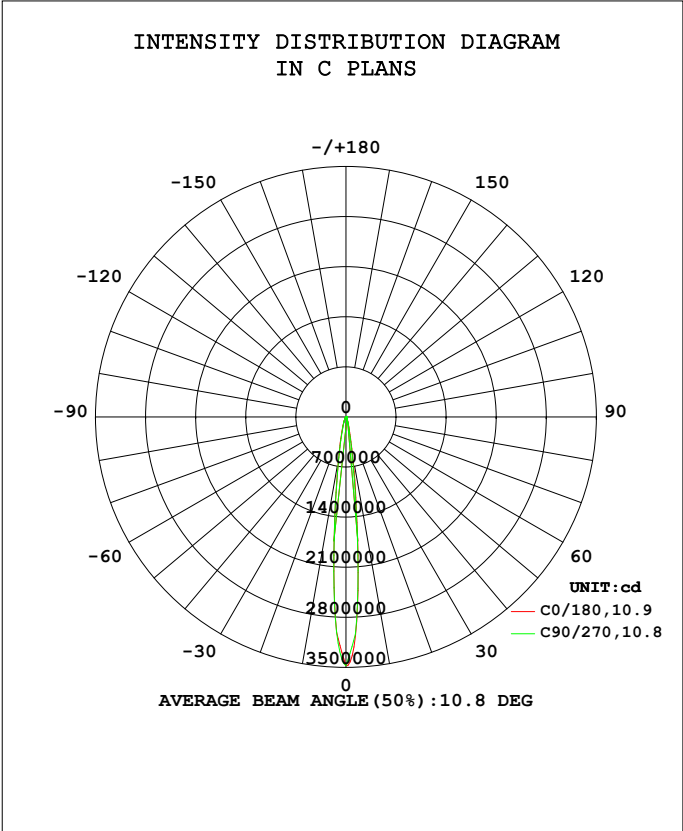

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2024-01-09

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4621]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

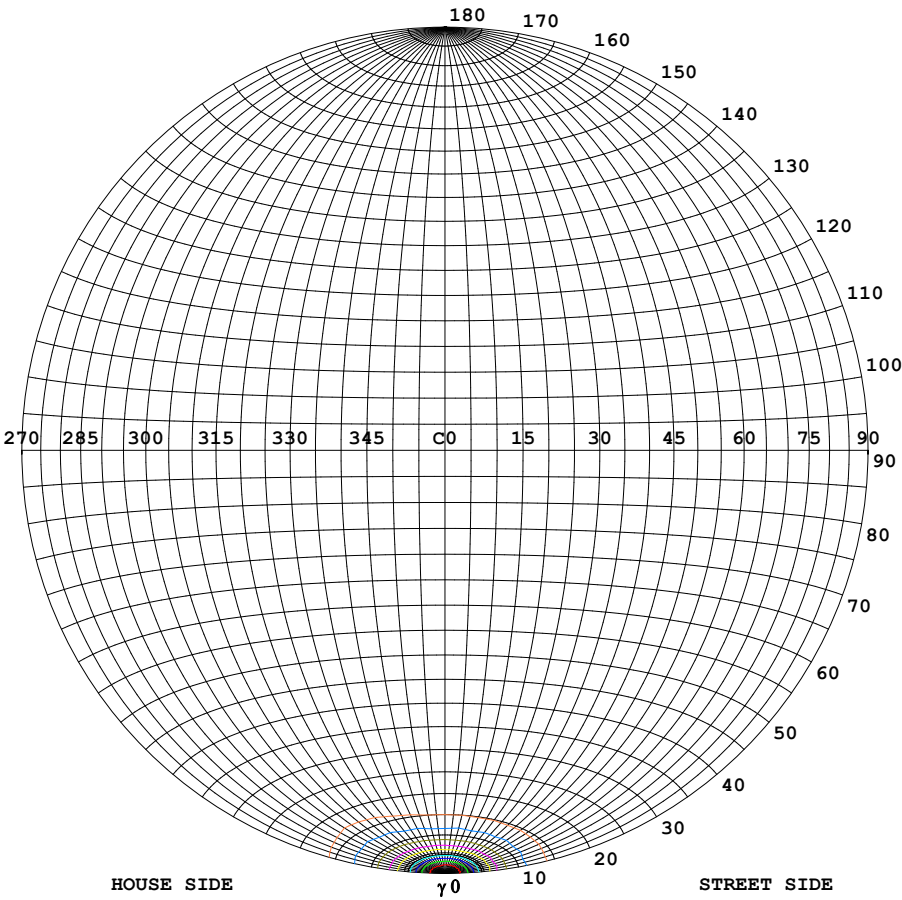



Classification:
IES:Type V - Very Short
CIE:Narrow - Short
IES:Cut-off
CIE:Full cut-off
Max.At80:3.306cd/klm
Max.At90:0.0285cd/klm
Max.80-90:3.306cd/klm
NRB 5101:Limited[0.7%]

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	3476643
90%	3128979
80%	2781314
70%	2433650
60%	2085986
50%	1738322
40%	1390657
30%	1042993
20%	695329
10%	347664
5%	173832

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2024-01-09

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

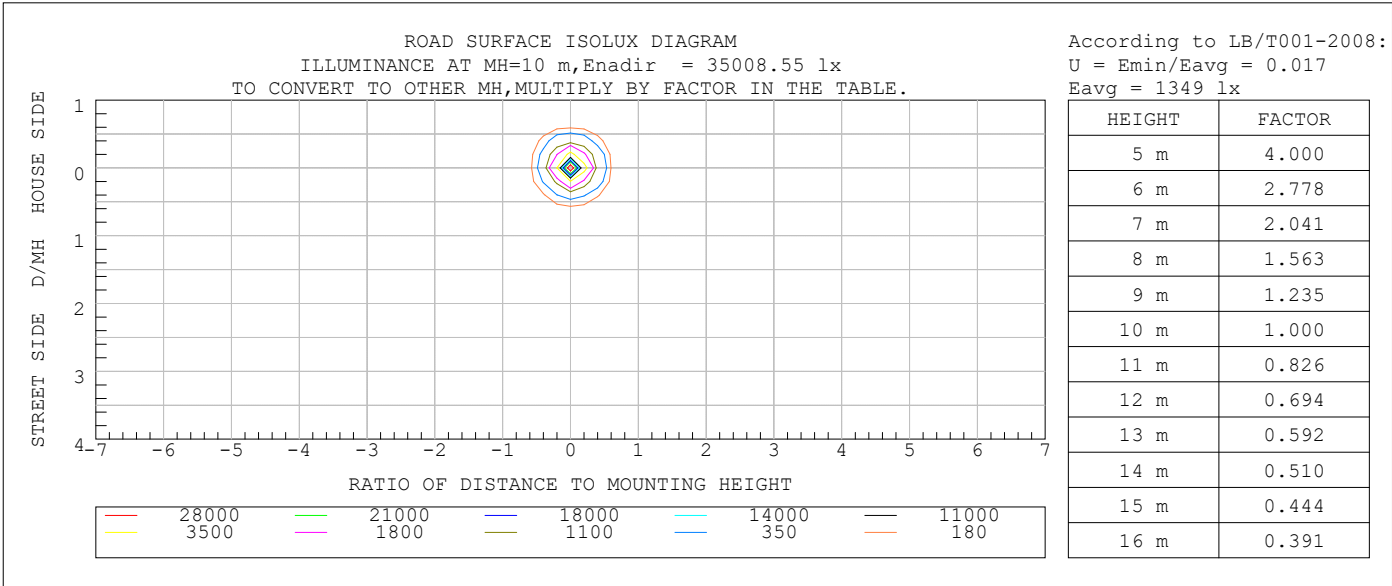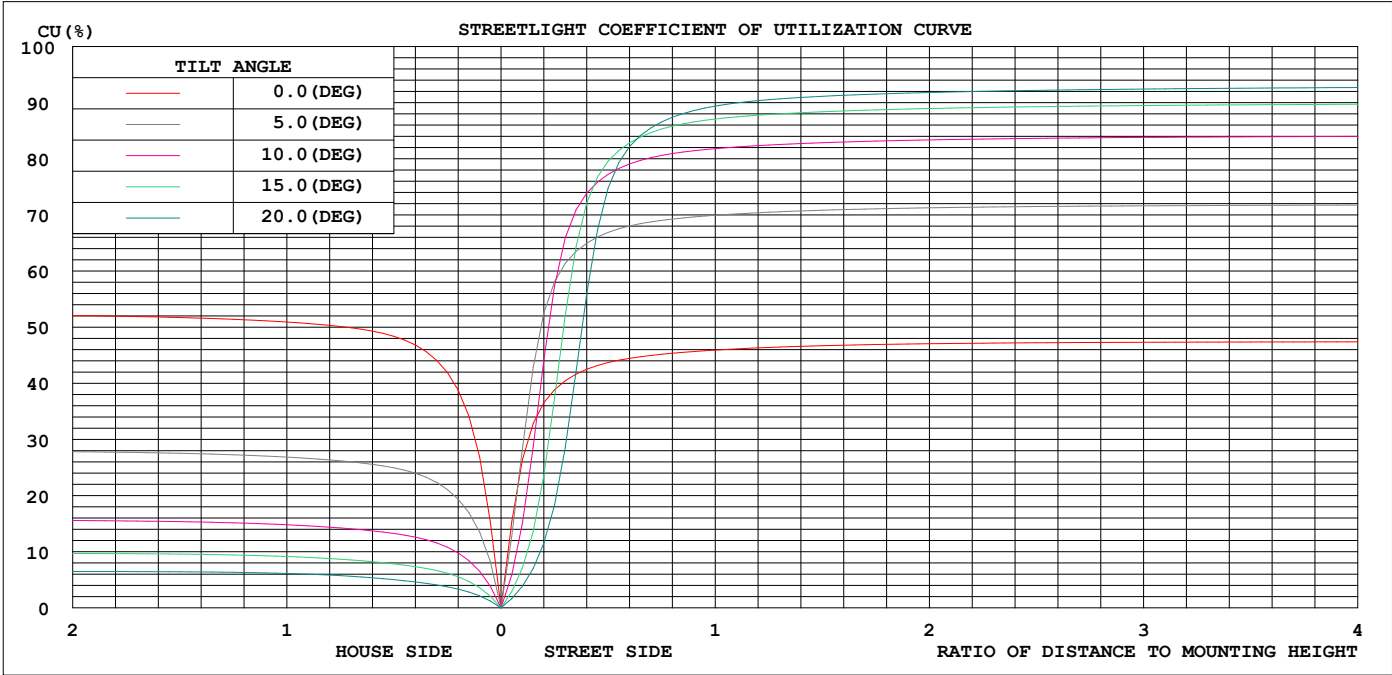

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2024-01-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4621]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


ZONAL FLUX DIAGRAM

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	506.6	487.1	459.3	520.4	593.9	603.9	575.7	574.9	0- 10	136201	136201	54.5,54.5
20	84.67	78.34	73.50	98.98	114.0	122.6	97.06	116.6	10- 20	61150	197351	78.9,78.9
30	22.99	22.39	21.96	27.69	30.70	33.30	28.48	32.35	20- 30	24631	221982	88.8,88.8
40	9.861	9.853	10.35	11.05	11.28	11.74	11.45	11.56	30- 40	10308	232290	92.9,92.9
50	6.431	6.688	7.185	7.041	6.787	7.193	7.348	7.127	40- 50	6595	238884	95.5,95.5
60	4.536	4.833	5.000	4.988	4.672	5.017	5.006	5.041	50- 60	5173	244057	97.6,97.6
70	2.904	3.101	2.899	3.137	3.059	3.222	3.072	3.232	60- 70	3842	247899	99.2,99.2
80	0.7931	0.7654	0.6973	0.7751	0.8266	0.7893	0.7443	0.8143	70- 80	1855	249754	99.9,99.9
90	0.0060	0.0063	0.0055	0.0049	0.0053	0.0053	0.0047	0.0058	80- 90	256.3	250010	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X1000cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:ZZX
Test Date:2024-01-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:


ISOCANDELA DIAGRAM

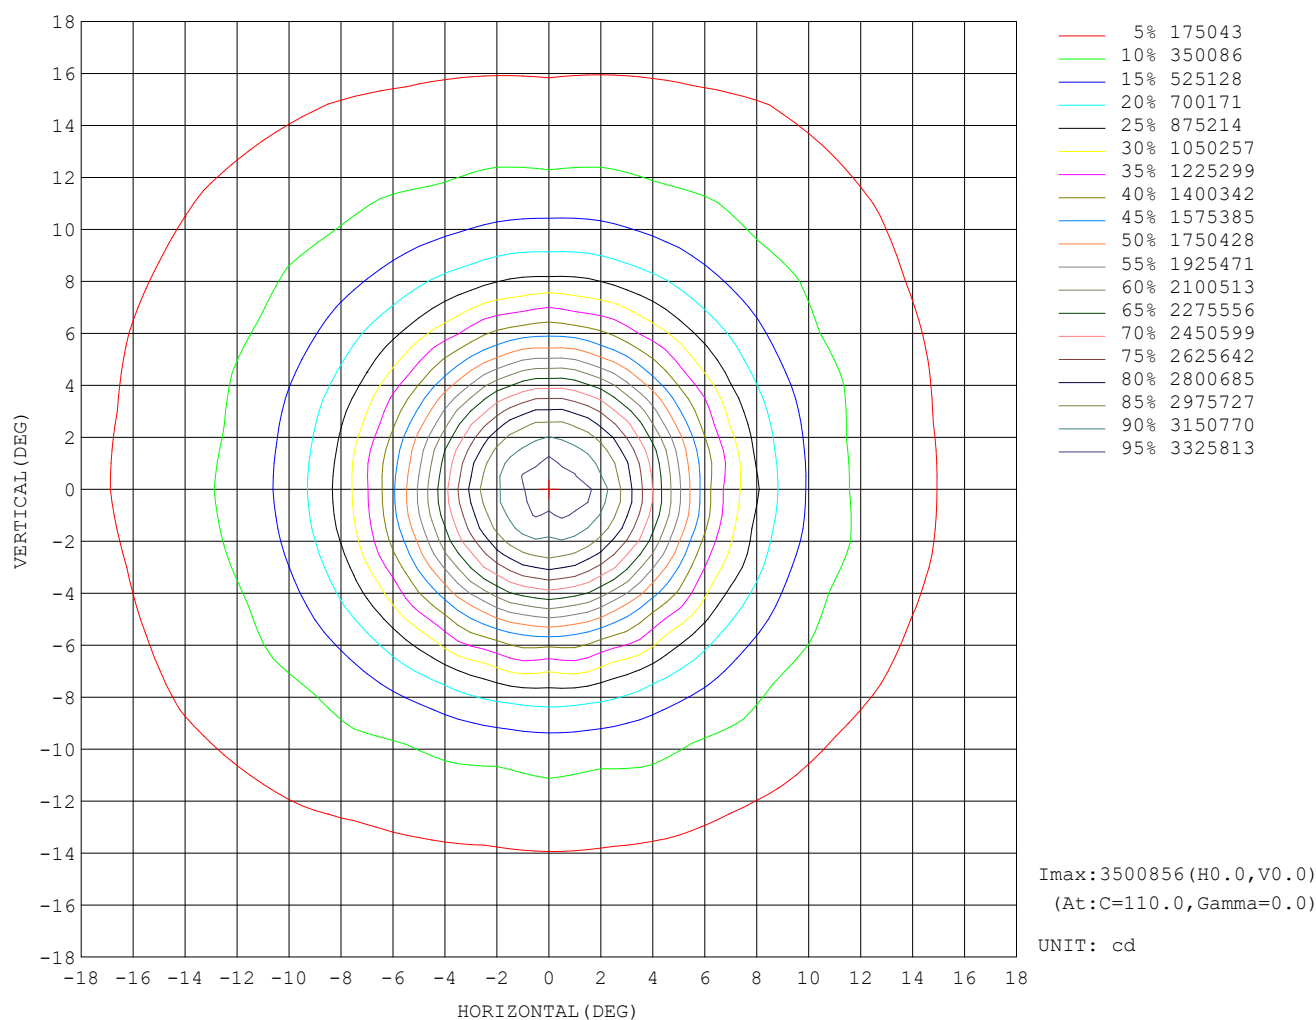

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2024-01-09

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4621]
Remarks:

Planar Illuminance Curve

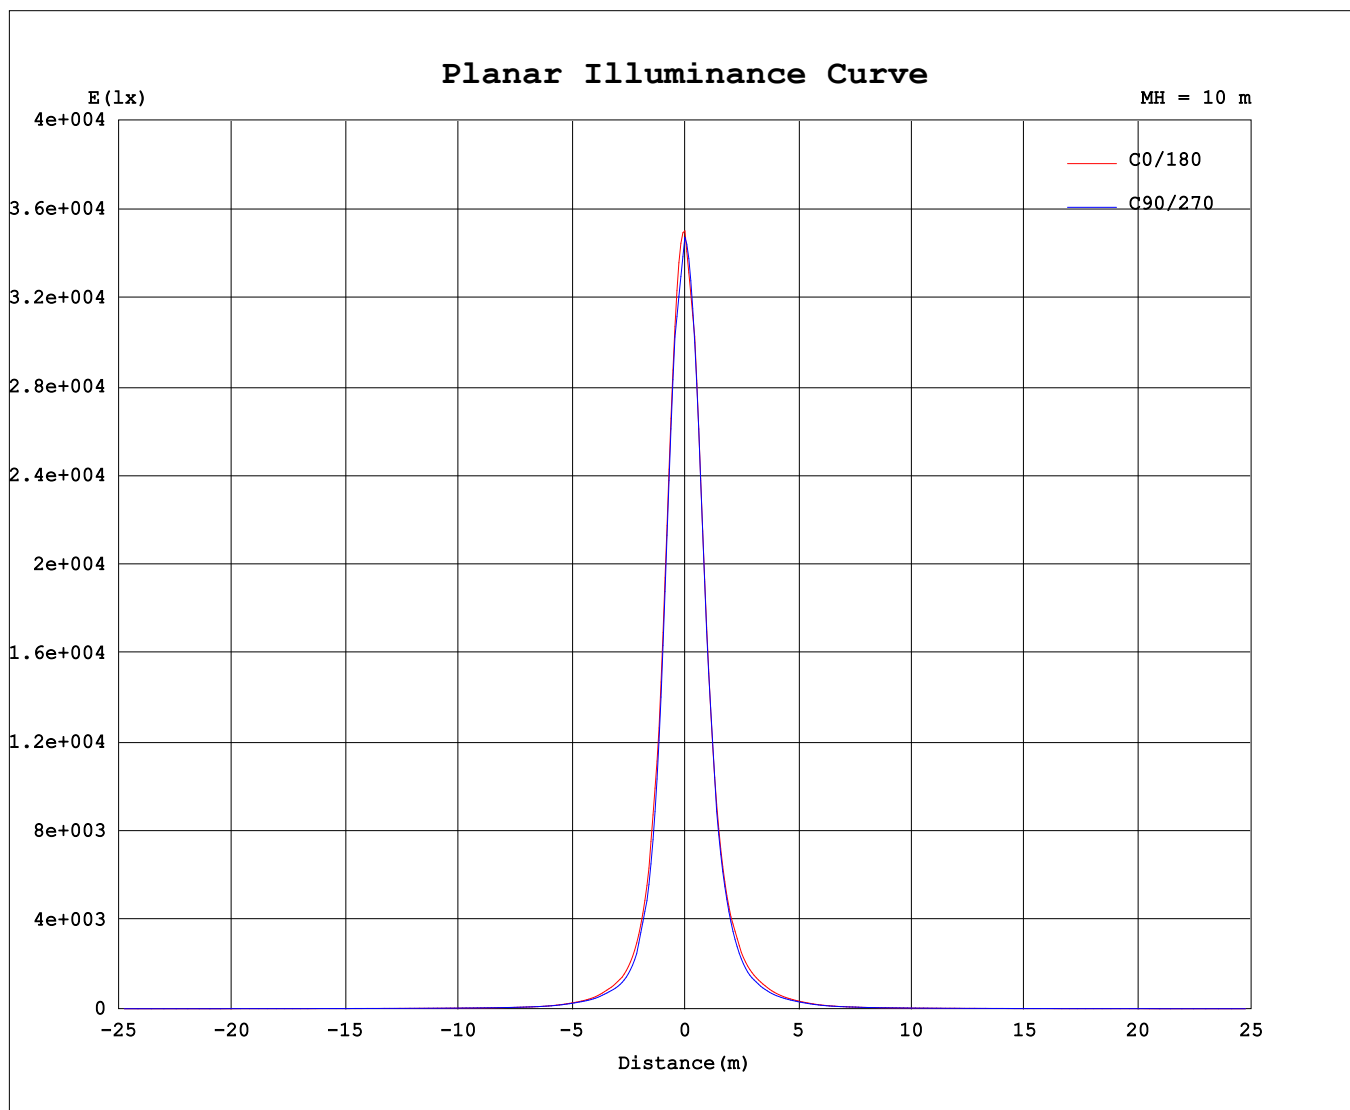

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2024-01-09


γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4621]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LCS REPORT

Test:U:230.0V I:7.842A P:1800.0W PF:0.998 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:250010x1 lm		
NAME: SP04-1K8-5770-F04011X	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

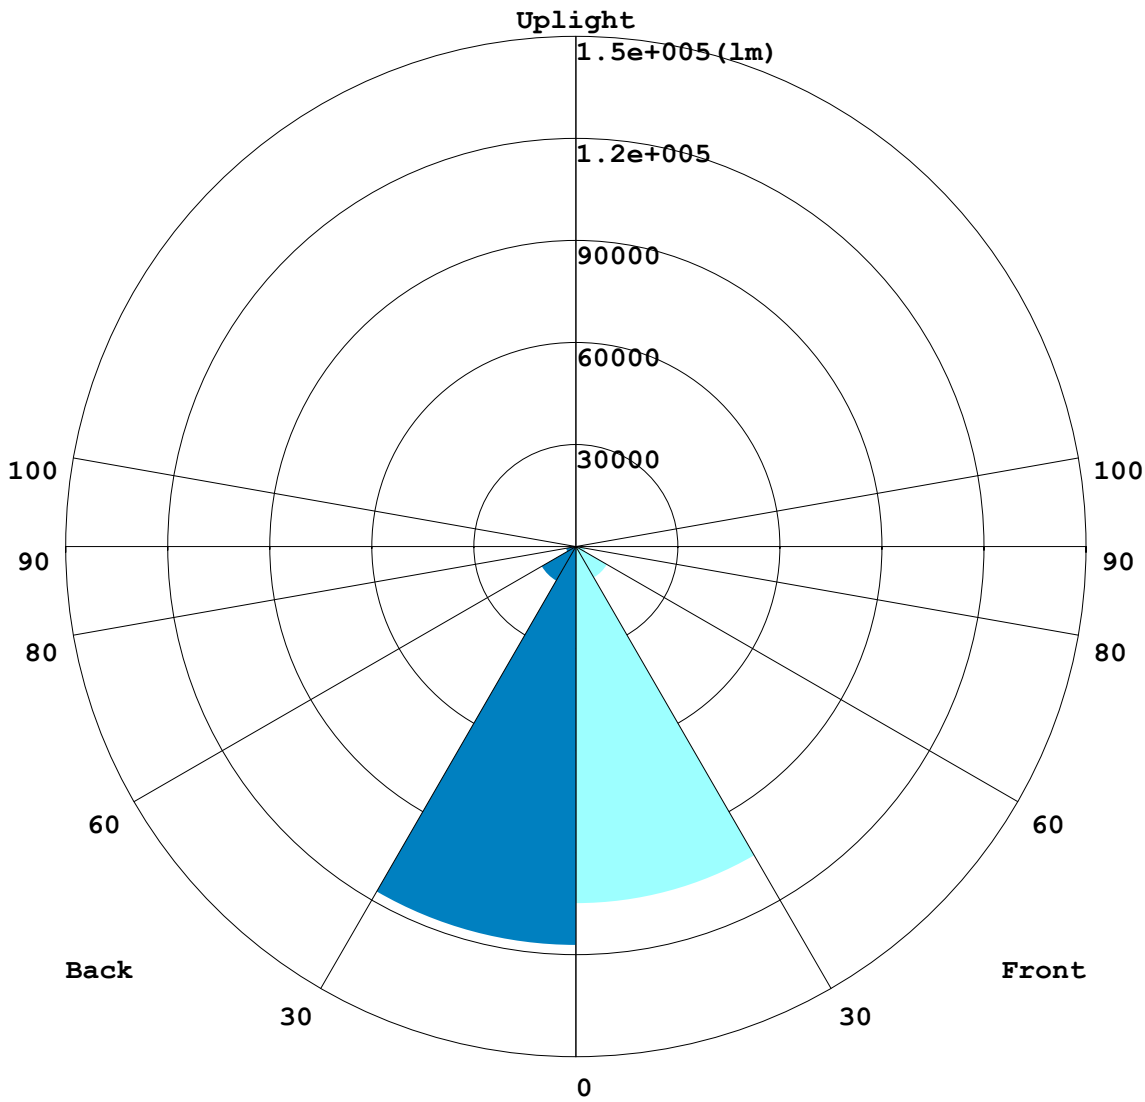

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2024-01-09

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

BUG REPORT

Test:U:230.0V I:7.842A P:1800.0W PF:0.998 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:250010x1 lm		
NAME: SP04-1K8-5770-F04011X	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	1.0485e+005	41.9
FM - Front-Medium(30-60)	10507	4.2
FH - Front-High(60-80)	2800.6	1.1
FVH - Front-Very High(80-90)	126.25	0.1
Total Forward Light	1.1828e+005	47.3

BL - Back-Low(0-30)	1.1714e+005	46.9
BM - Back-Medium(30-60)	11568	4.6
BH - Back-High(60-80)	2896.2	1.2
BVH - Back-Very High(80-90)	130.09	0.1
Total Back Light	1.3173e+005	52.7

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B5-U0-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	1.3173e+005	0	1.3173e+005
Street Side	1.1828e+005	0	1.1828e+005

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2024-01-09


γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ROAD ISOCANDELA REPORT

Test:U:230.0V I:7.842A P:1800.0W PF:0.998 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:250010x1 lm		
NAME: SP04-1K8-5770-F04011X	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

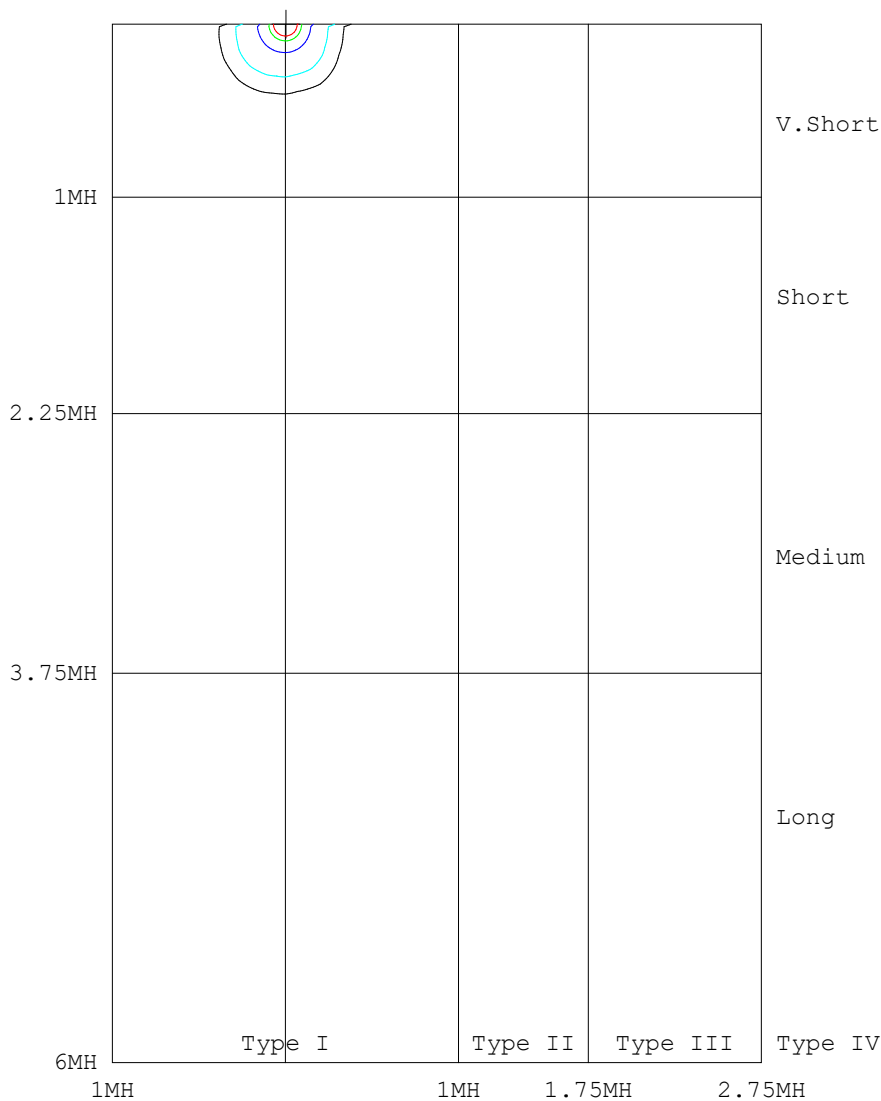

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2024-01-09

Pavement

Road

70% 2.424e+008
50% 1.732e+006
5% 1.732e+005

90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

UNIT: X1000cd

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

UNIT: X1000cd

[illegible]

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2024-01-09

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4621]
Remarks:

```