


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.0V I:2.140A P:480.0W PF:0.975 Freq:50.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:90457.5x1 lm		
NAME: LHB09-480H-5070-L03902	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA Eff: 188.45 lm/W			
MODEL	/	I _{max} (cd)	61245	S/MH (C0/180)	1.14
NOMINAL POWER (W)	/	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	/	TOTAL FLUX (lm)	90457	η UP,DN (C0-180)	0.0,50.0
NOMINAL FLUX (lm)	90457.5	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	/	η down (%)	100.0	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

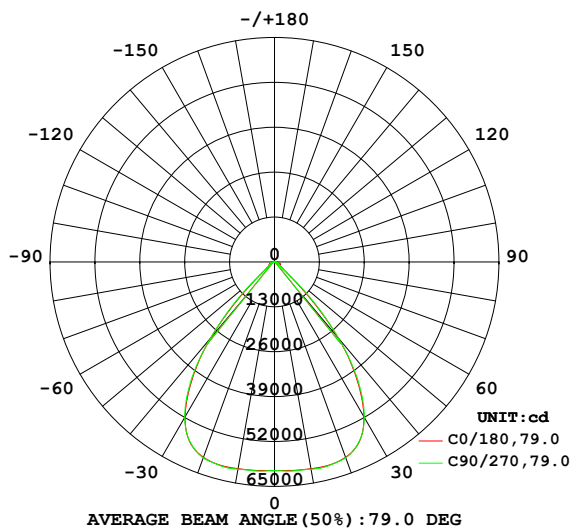

AVERAGE BEAM ANGLE (50%): 79.0 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

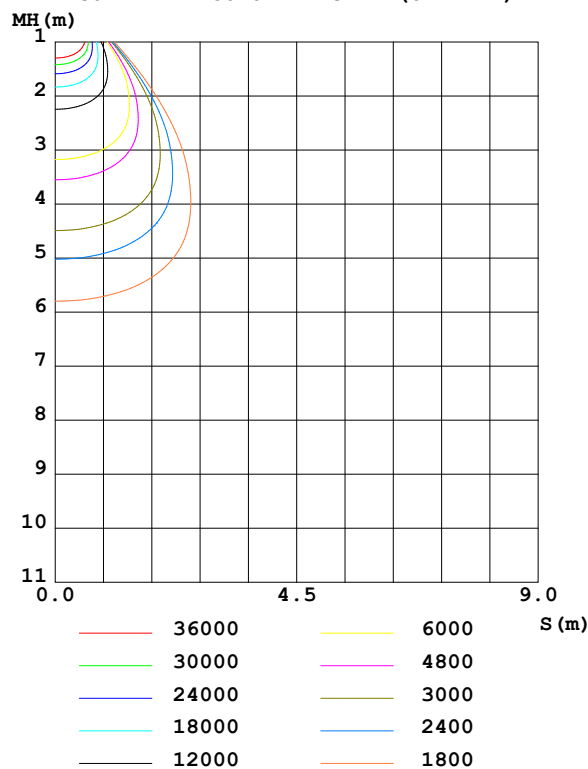

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2023-03-17

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4556]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	6080	6090	6095	6090	6080	6090	6095	6090	0- 10	5800	5800	6.41,6.41
20	6018	6064	6035	6064	6018	6064	6035	6064	10- 20	17272	23072	25.5,25.5
30	5179	5254	5201	5254	5179	5254	5201	5254	20- 30	26485	49557	54.8,54.8
40	2878	2821	2874	2821	2878	2821	2874	2821	30- 40	25563	75121	83,83
50	352.1	356.5	378.5	356.5	352.1	356.5	378.5	356.5	40- 50	11010	86130	95.2,95.2
60	177.3	149.4	157.8	149.4	177.3	149.4	157.8	149.4	50- 60	1934	88064	97.4,97.4
70	147.5	83.33	117.0	83.33	147.5	83.33	117.0	83.33	60- 70	1248	89313	98.7,98.7
80	77.49	52.70	42.81	52.70	77.49	52.70	42.81	52.70	70- 80	852.5	90165	99.7,99.7
90	2.501	1.262	2.146	1.262	2.501	1.262	2.146	1.262	80- 90	292.4	90457	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 83014 lm

%lum = 91.8%

%lamp = 91.8%

Conical surface Flux(120deg): 88064 lm


%lum = 97.4%

%lamp = 97.4%

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:LYJ
Test Date:2023-03-17

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4556]
Remarks:

LUMINANCE LIMITATION CURVES

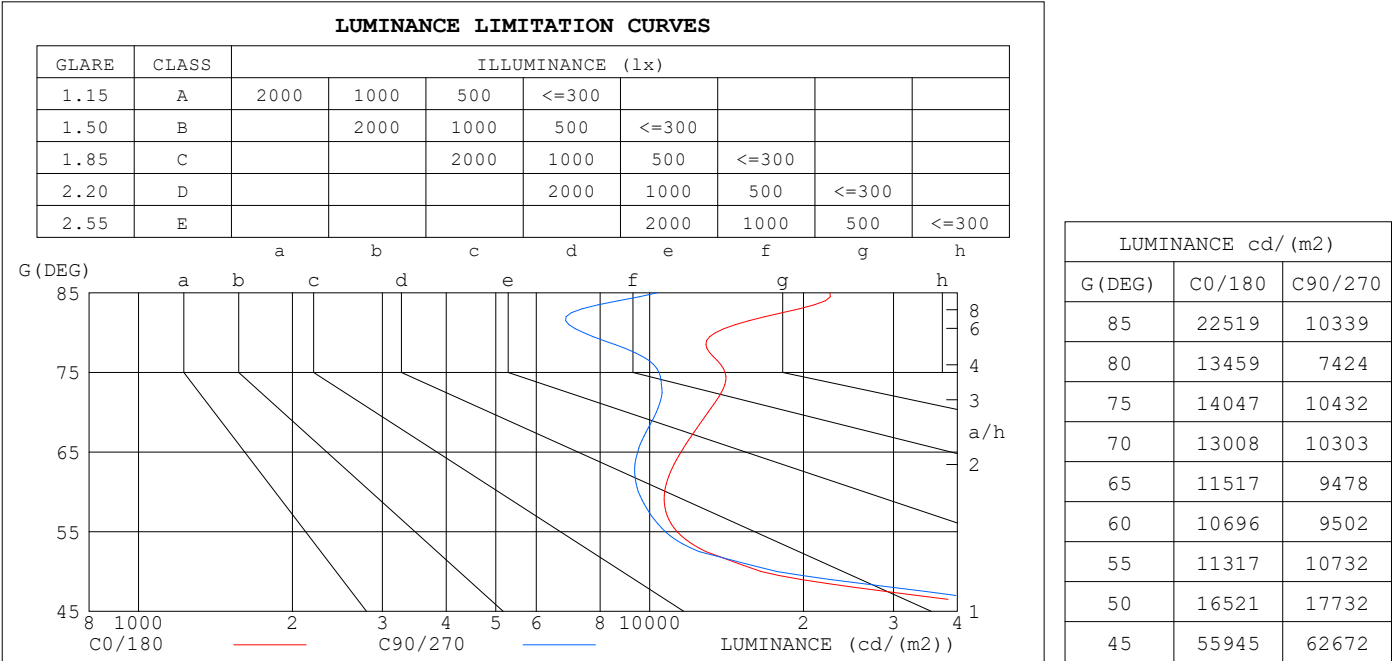


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:LYJ
Test Date:2023-03-17

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4556]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.07	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.98	.96	.96	.95	.93	.92
2.0	1.00	.96	.92	.99	.94	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.92	.87	.82	.91	.86	.81	.88	.84	.80	.86	.82	.79	.83	.80	.78	.76
4.0	.85	.79	.74	.84	.78	.73	.82	.77	.73	.80	.75	.72	.78	.74	.71	.69
5.0	.79	.72	.67	.78	.71	.67	.76	.70	.66	.74	.69	.65	.72	.68	.65	.63
6.0	.73	.66	.61	.72	.66	.61	.70	.65	.60	.69	.64	.60	.67	.63	.60	.58
7.0	.68	.61	.56	.67	.60	.56	.65	.60	.55	.64	.59	.55	.63	.58	.55	.53
8.0	.63	.56	.51	.62	.56	.51	.61	.55	.51	.60	.55	.51	.59	.54	.51	.49
9.0	.59	.52	.47	.58	.52	.47	.57	.51	.47	.56	.51	.47	.55	.50	.47	.45
10.0	.55	.48	.44	.54	.48	.44	.53	.48	.44	.53	.47	.44	.52	.47	.43	.42

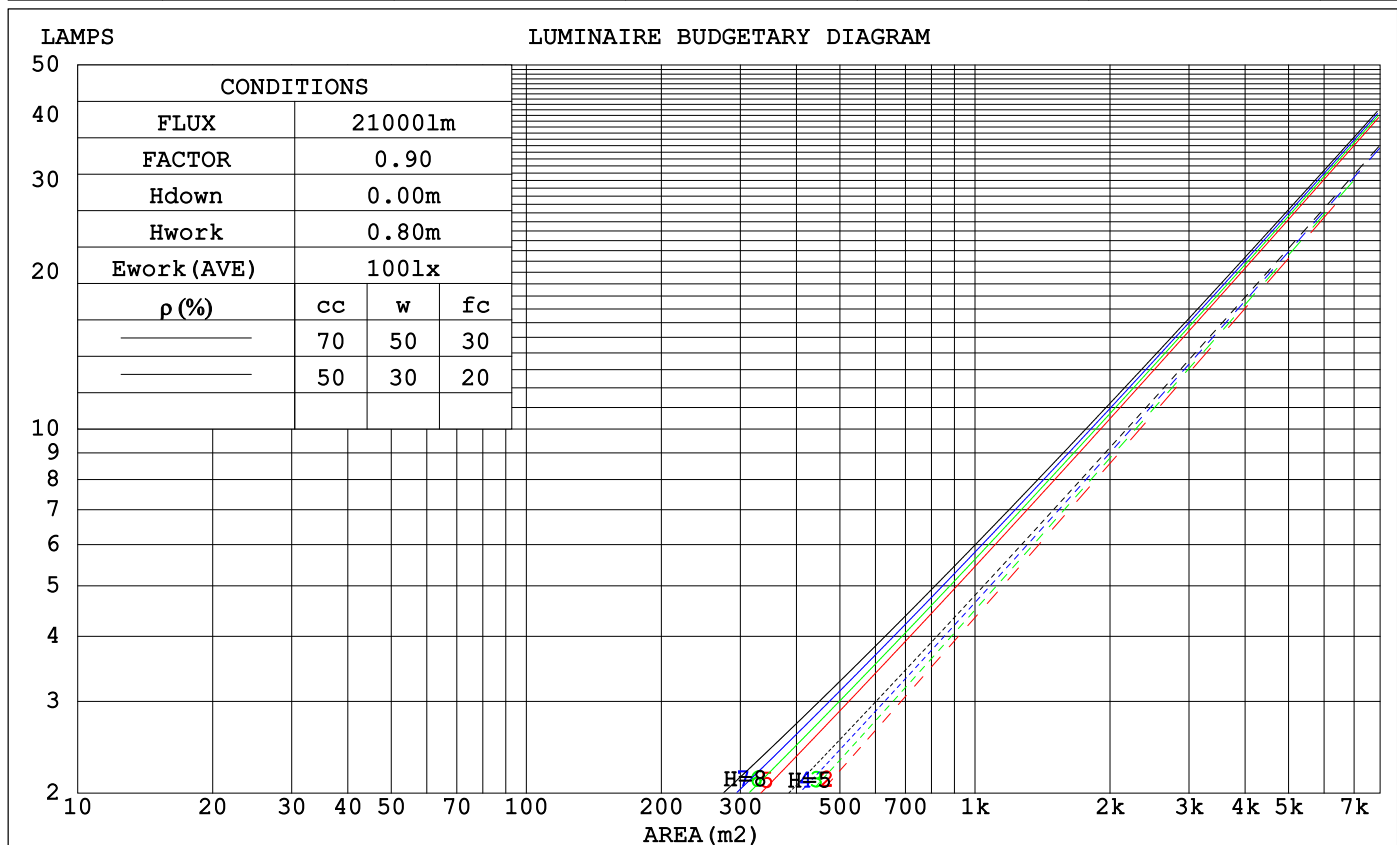

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:LYJ
Test Date:2023-03-17

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4556]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.204	.116	.037	.197	.113	.036	.185	.106	.034	.173	.100	.032	.162	.094	.030	
2.0	.196	.108	.033	.190	.105	.032	.180	.100	.031	.170	.095	.030	.160	.091	.029	
3.0	.187	.100	.030	.182	.098	.029	.173	.094	.028	.164	.090	.028	.156	.086	.027	
4.0	.178	.092	.027	.174	.091	.027	.165	.088	.026	.158	.085	.026	.151	.082	.025	
5.0	.169	.086	.025	.166	.085	.025	.158	.082	.024	.152	.080	.024	.145	.078	.023	
6.0	.161	.081	.023	.158	.080	.023	.152	.078	.023	.146	.076	.022	.140	.074	.022	
7.0	.154	.076	.022	.151	.075	.021	.145	.073	.021	.140	.072	.021	.135	.070	.021	
8.0	.147	.072	.020	.144	.071	.020	.139	.069	.020	.134	.068	.020	.130	.067	.019	
9.0	.140	.068	.019	.138	.067	.019	.133	.066	.019	.129	.065	.018	.125	.063	.018	
10.0	.134	.064	.018	.132	.064	.018	.128	.063	.018	.124	.061	.017	.120	.060	.017	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.157	.143	.148	.135	.123	.101	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.160	.132	.110	.137	.114	.095	.094	.079	.066	.054	.046	.039	.017	.015	.013	
3.0	.149	.114	.086	.127	.098	.075	.087	.068	.052	.050	.040	.031	.016	.013	.010	
4.0	.139	.099	.069	.120	.086	.060	.082	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.131	.088	.056	.113	.076	.049	.078	.053	.035	.045	.031	.020	.015	.010	.007	
6.0	.124	.079	.047	.107	.069	.041	.074	.048	.029	.043	.028	.017	.014	.009	.006	
7.0	.118	.072	.039	.102	.062	.034	.070	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.113	.066	.034	.097	.057	.029	.067	.040	.021	.039	.024	.012	.013	.008	.004	
9.0	.108	.061	.029	.093	.053	.025	.064	.037	.018	.037	.022	.011	.012	.007	.004	
10.0	.103	.057	.026	.089	.049	.022	.062	.035	.016	.036	.020	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2023-03-17

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity:65.0%
 Test Distance:26.000m [K=0.4556]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7
	3H	15.8	16.8	16.2	17.1	17.5	15.7	16.1	15.7	16.5	16.8
	4H	17.0	17.9	17.4	18.3	18.7	16.0	17.0	16.5	17.3	17.7
	6H	17.9	18.7	18.3	19.1	19.5	16.6	17.4	17.0	17.8	18.2
	8H	18.3	19.1	18.7	19.5	19.9	16.7	17.5	17.1	17.9	18.3
	12H	18.9	19.6	19.3	20.0	20.4	16.8	17.6	17.3	18.0	18.4
4H	2H	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7
	3H	16.2	17.0	16.7	17.4	17.8	15.7	16.4	16.1	16.8	17.2
	4H	17.6	18.2	18.0	18.6	19.1	16.7	17.4	17.2	17.8	18.3
	6H	18.6	19.1	19.0	19.6	20.1	17.4	18.0	17.9	18.4	18.9
	8H	19.1	19.6	19.5	20.1	20.5	17.5	18.1	18.0	18.5	19.0
	12H	19.7	20.2	20.2	20.6	21.1	17.7	18.2	18.2	18.7	19.2
8H	4H	17.7	18.3	18.2	18.7	19.2	17.0	17.5	17.5	18.0	18.4
	6H	18.9	19.3	19.4	19.8	20.3	17.8	18.3	18.3	18.8	19.2
	8H	19.4	19.8	20.0	20.3	20.8	18.1	18.4	18.6	19.0	19.5
	12H	20.1	20.5	20.7	21.0	21.5	18.3	18.6	18.8	19.1	19.7
12H	4H	17.7	18.2	18.2	18.7	19.2	17.0	17.5	17.5	18.0	18.4
	6H	18.9	19.3	19.4	19.8	20.3	17.9	18.3	18.4	18.8	19.3
	8H	19.5	19.9	20.1	20.4	20.9	18.2	18.5	18.7	19.0	19.6
CIE190: 2010											

CIE190: 2010
Area: 0.332 m2

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:LYJ
Test Date:2023-03-17

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4556]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	81	74	69	80	73	69	80	73	69	65
0.80	89	82	78	89	82	78	87	81	77	73
1.00	95	88	84	94	88	84	92	88	83	79
1.25	100	94	89	99	93	89	96	92	88	84
1.50	103	97	93	102	96	93	99	95	92	87
2.00	106	101	98	105	100	97	102	98	96	90
2.50	108	104	100	107	103	100	103	100	98	91
3.00	110	106	103	108	105	102	105	102	100	93
4.00	112	109	107	110	108	105	107	104	102	95
5.00	114	111	109	112	109	107	108	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004						Suspended			SHRNOM = 1.25	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: LYJ
 Test Date: 2023-03-17

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity: 65.0%
 Test Distance: 26.000m [K=0.4556]
 Remarks:


ISOCANDELA DIAGRAM

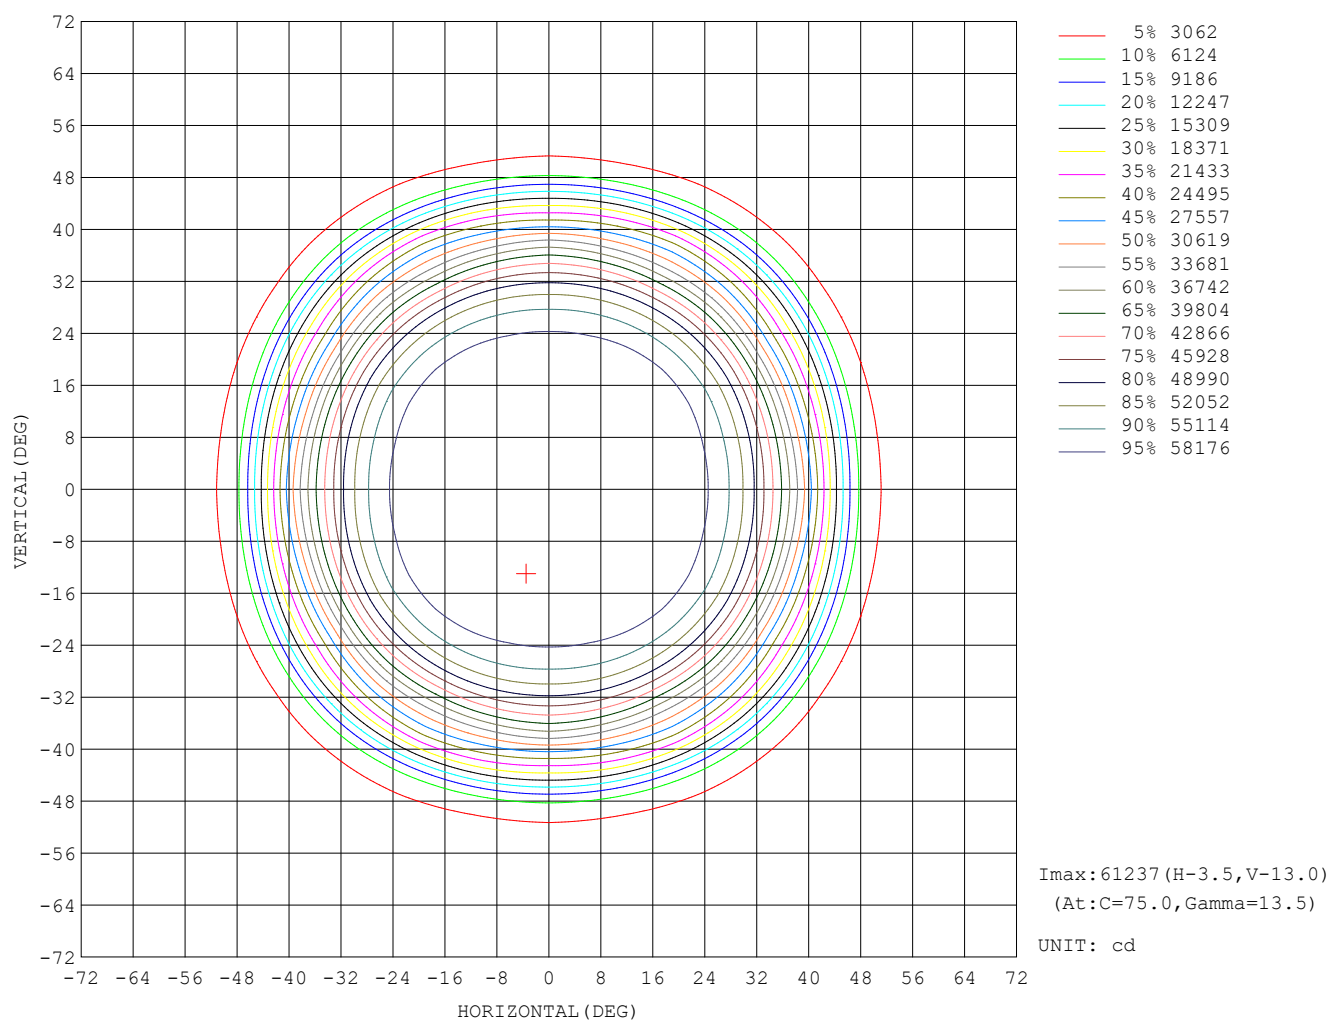

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2023-03-17

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4556]
Remarks:

AAI Figure

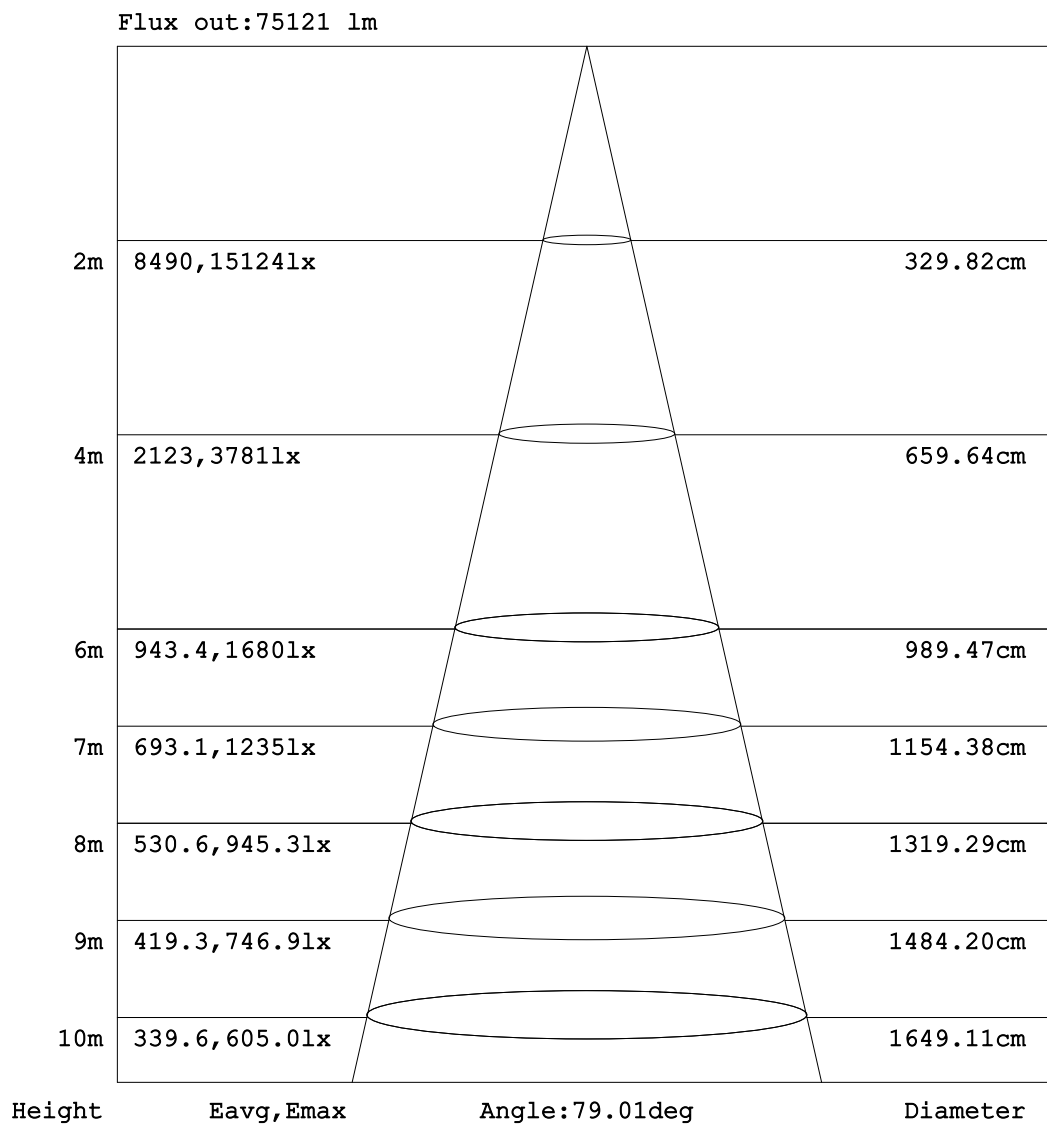


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:LYJ
Test Date:2023-03-17

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4556]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


ISOLUX DIAGRAM

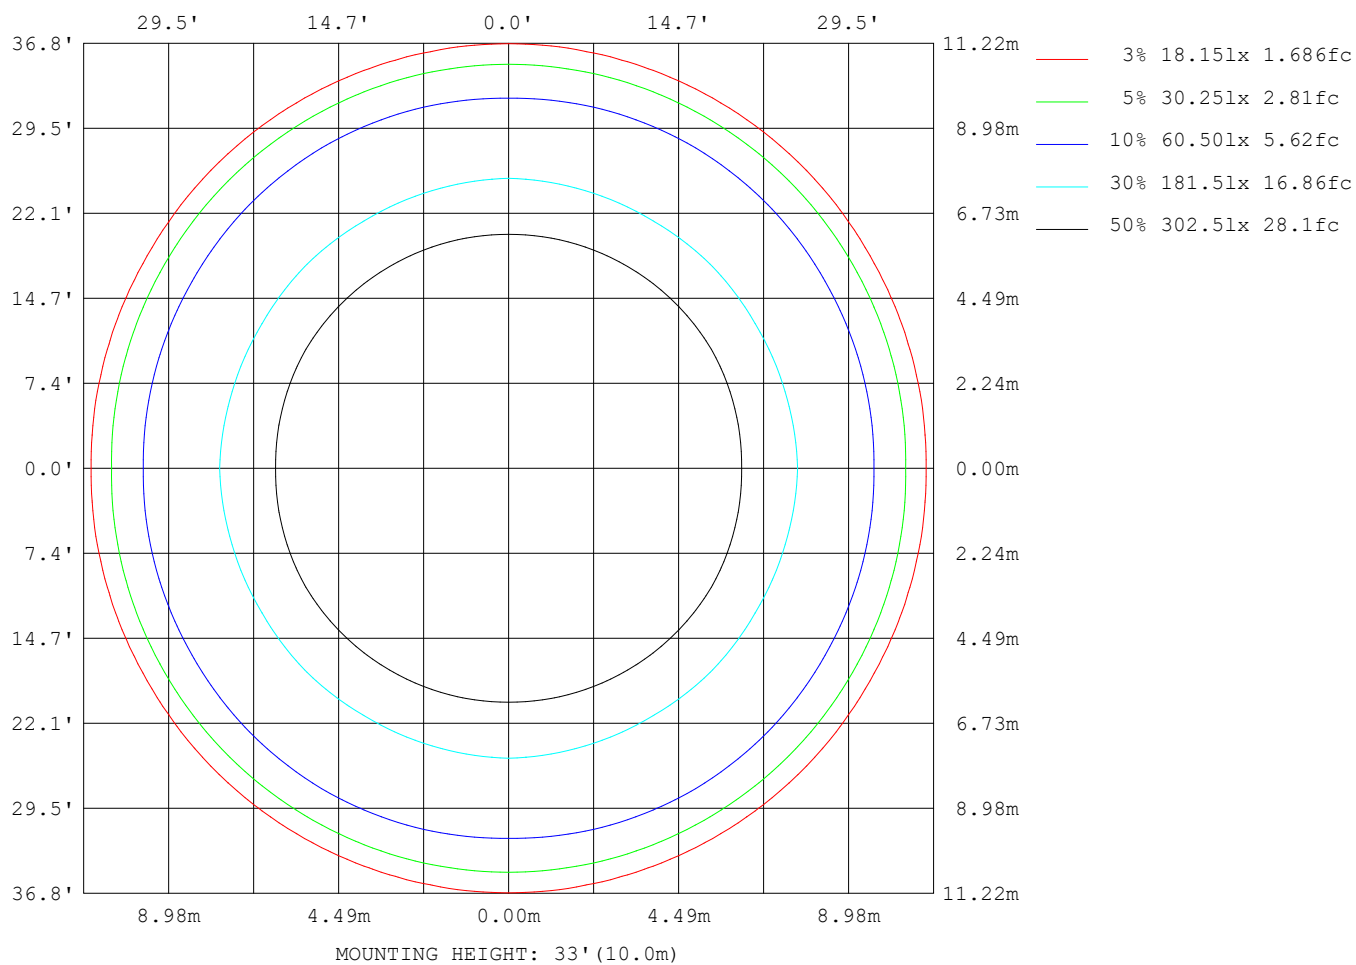

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2023-03-17

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4556]
Remarks:

Planar Illuminance Curve

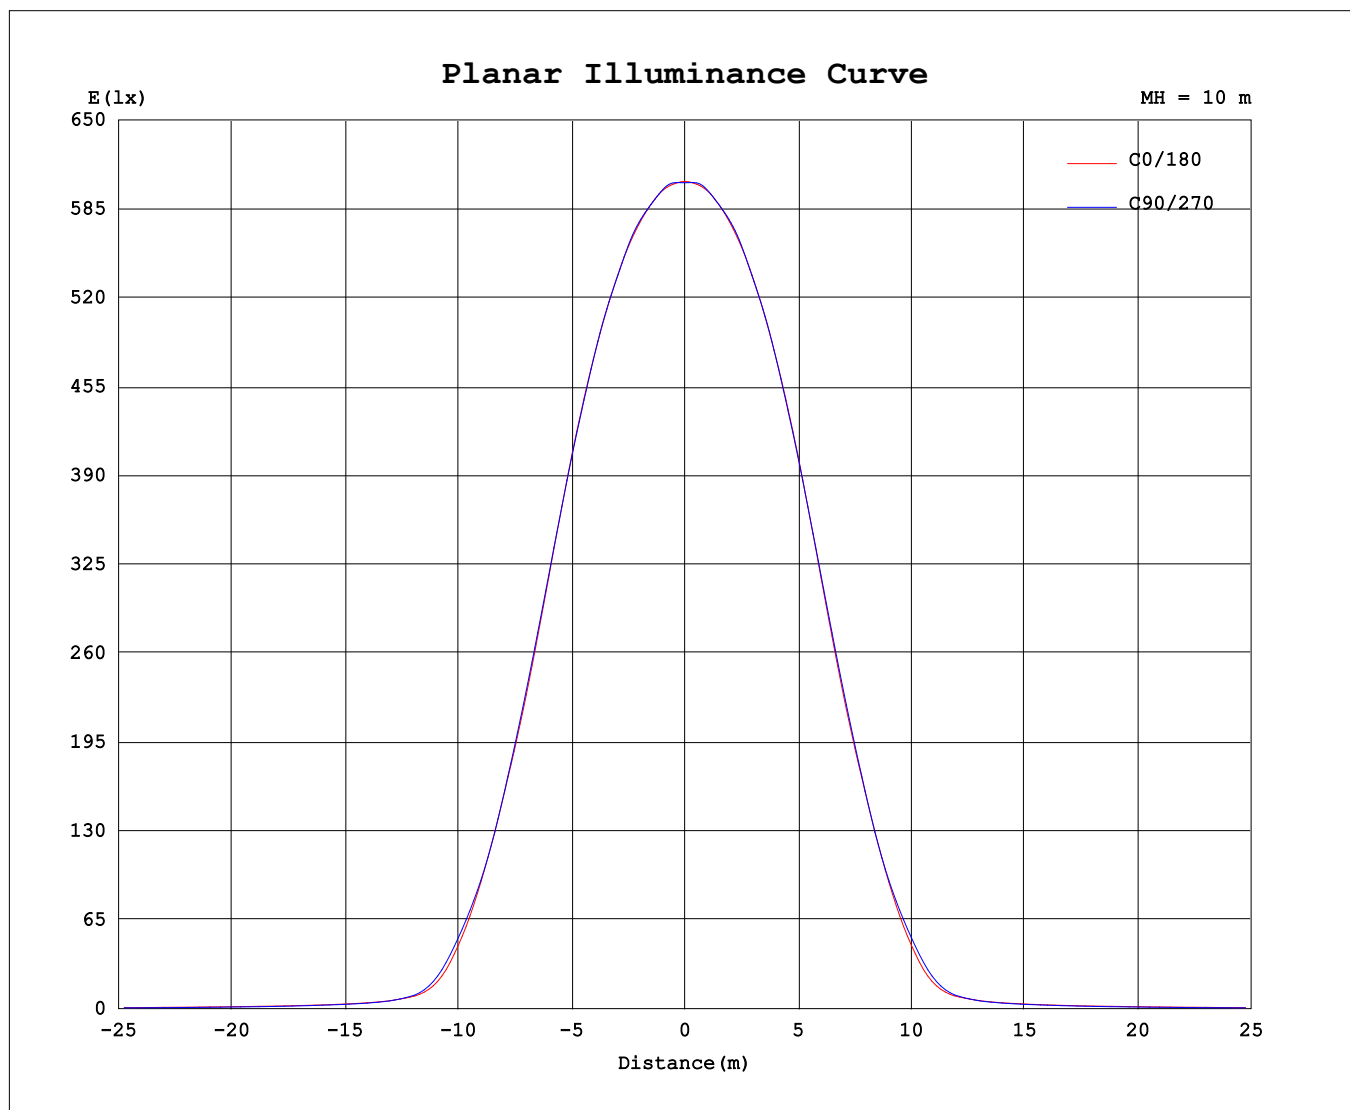

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2023-03-17

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4556]
Remarks: