

WWW.ASTONLIGHTING.COM



LIVERPOOL 07

Spec Sheet **ASTON LED**

LVP 07

Linear Lighting

ASTON

High-Efficiency Modular Linear Lighting for Logistic and Industrial Areas

Liverpool 07 is a **high-efficiency** linear LED luminaire delivering up to **150 lm/W**, designed to maximize energy savings in logistics and industrial environments. Its high luminous efficacy ensures **bright and uniform illumination**, reducing operational costs. The **splicing connection system** enables seamless modular installations, covering extensive areas such as storage aisles, loading zones, and operational spaces. With a **robust polycarbonate body** rated **IP65 and IK08**, it offers resistance to dust, water, and impacts. Available in various wattages and lengths, it adapts to multiple mounting options for versatile applications.


Applications




Logistics and
distribution
centers



Storage aisles

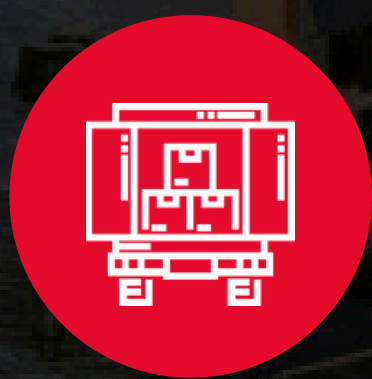

Loading and
unloading zones

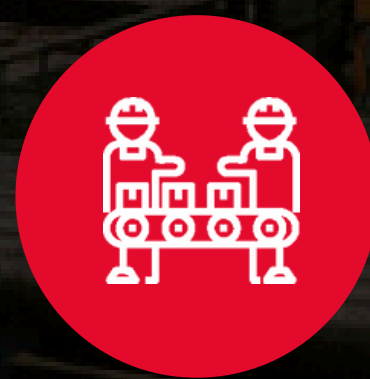

Industrial
operational areas



Indoor parking
facilities

Certifications

CE RoHS



CB

01




High Luminous Efficacy: Up to **150 lm/W**, providing bright and energy-efficient lighting.

Modular Design with Splicing Connection: Enables continuous illumination over large areas without interruptions.

02



03

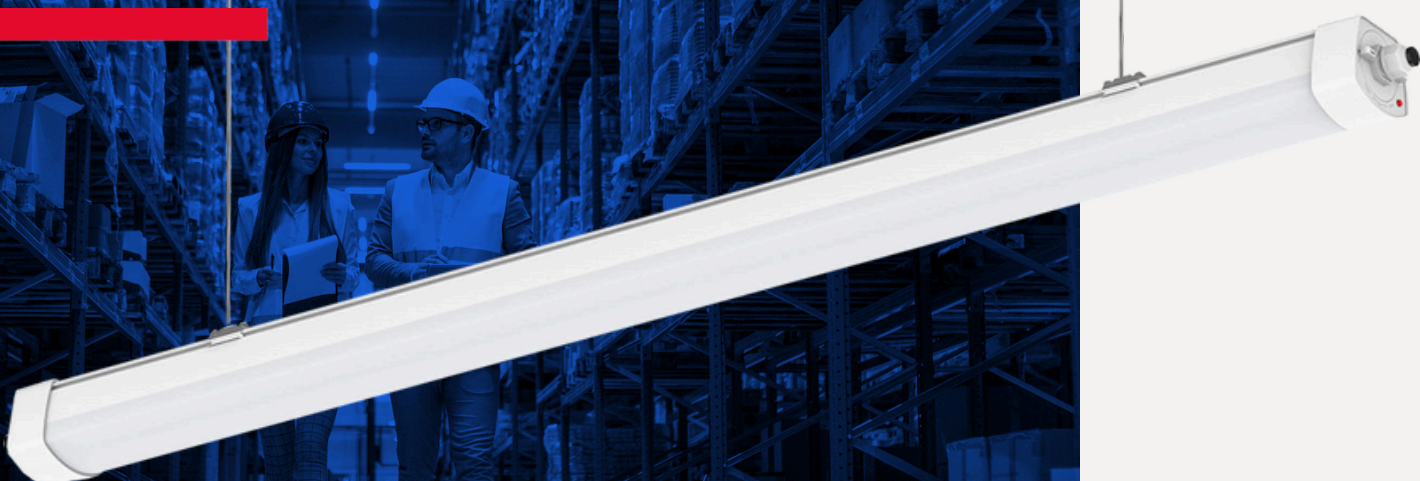



Durable Construction: Polycarbonate body with **IP65** and **IK08** ratings for demanding industrial environments.

Versatile Mounting Options: Compatible with ceiling, wall, or suspension installations.

04



Technical Specifications

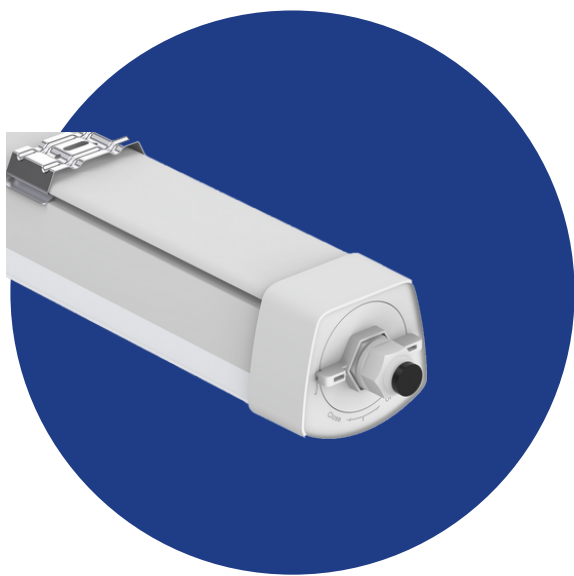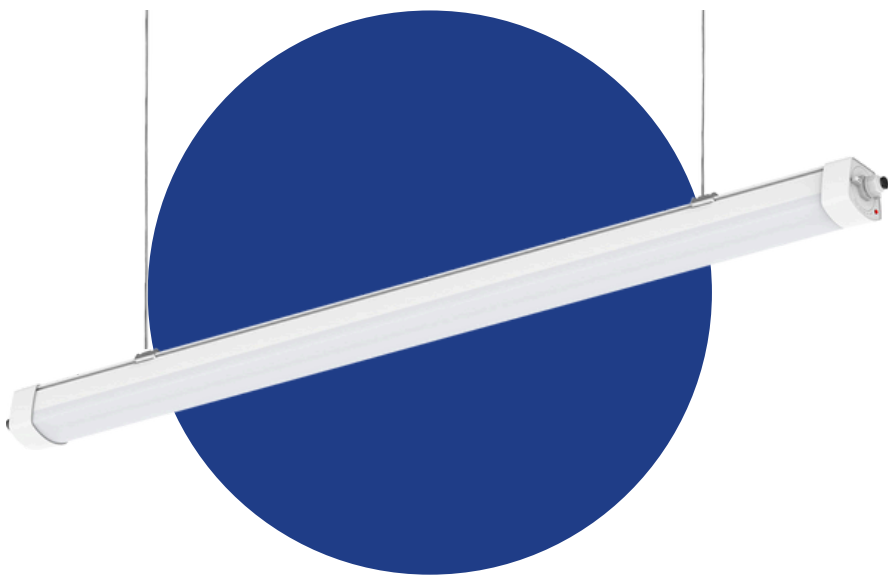

Technical Specifications				
Model No.	LVP 07-1200-38	LVP 07-1500-52	LVP 07-1500-68	LVP 07-1800-68
Power (W)	38W	52W	68W	68W
Luminous Flux (lm)	5,000 – 5,500 lm	7,300 – 7,700 lm	9,000 – 9,600 lm	9,000 – 9,600 lm
Luminous Efficacy (lm/W)	150 lm/W			
Correlated Color Temperature (CCT)	4000K (Optional: 3000K, 5000K, 5700K)			
Color Rendering Index (CRI)	≥80			
Input Voltage (V, Hz)	200-240 V AC, 50/60 Hz			
Power Factor (PF)	≥0.90			
Dimming	DALI			
Control	Microwave sensor + Daylight sensor			
IP Rating	IP65			
IK Rating	IK08			
Material	Shockproof polycarbonate (PC), extruded PC opal diffuser with UV resistance			
Mounting Option	Surface mount / Pendant			
Dimensions (mm)	1200 × 77 × 69	1500 × 77 × 69	1500 × 77 × 69	1800 × 77 × 69
Weight (kg)	1.7 kg	2.1 kg	2.1 kg	2.3 kg
Working Temperature (°C)	-20°C to +40°C			
Lifespan (h)	50,000 h			
Warranty	5 years			

ASTON

WWW.ASTONLIGHTING.COM